



More information on the website
mirror.radwag.com/en/info,w1,299

C315.150/300.C3.K Load Cell Platform Scale

WP-123-1029



The drawings, photos and graphics used are for illustrative purposes only.

Functions

 Plus/Minus Control

 Percent Weighing

 Totalizing

 Parts counting

 Internal battery

 Peak hold

 Newton unit measurement

 GLP Procedures

 Animal weighing

 ALIBI Memory

Datasheet

| Metrological parameters | |
|-------------------------|--------------|
| Maximum capacity [Max] | 150 / 300 kg |
| Minimum load | 1 kg |
| Readability [d] | 50 / 100 g |
| Verification unit [e] | 50 / 100 g |
| Tare range | -300 kg |
| OIML Class | III |

| Physical parameters | |
|--------------------------------|-------------------------------------|
| Display | 4.3" LCD (backlit) |
| Cable length | 2.5 m |
| Weighing pan dimensions | 500×700 mm |
| Packaging dimensions W x D x H | 730×800×270 mm |
| Net weight | 20.5 kg |
| Gross weight | 26.8 kg |
| Construction | |
| Protection class | IP 65 construction, IP 43 terminal |
| Construction | mild steel St3S |
| Weighing pan material | Stainless steel AISI304 |
| Communication interface | |
| Communication interface | RS232 |
| Optional interfaces | RS232 |
| Electrical parameters | |
| Power supply | 100 – 240 V AC 50/60 Hz and battery |
| Power consumption max. | 5 W |
| Operation time on batteries | max 8h |
| Environmental conditions | |
| Operating temperature | -10 – +40 °C |
| Storage temperature | -10 – +50 °C |
| Relative humidity | 10% – 85% RH no condensation |
| Indicator | C315 |



Additional fee for verification



Accessories (Additional Fee)

Power Adapters
 RS 232 cables (scale - printer)
 Stands, wall mounting kits and mounting brackets
 Cigarette lighter receptacle power supply cables
 Displays
 RS 232, RS 485 cables


RS 232 – Ethernet Converter
 AP2-1 Current Loop Unit
 RS 232 – USB Converter
 RS 232 – RS 485 Converter
 Receipt Printer

Software (Additional Fee)

- RAD Key [WX-010-0005]
- Scale Editor 2.1 [WX-010-0173]

- R-Lab [WX-010-0080]


Device dimensions W x D x H

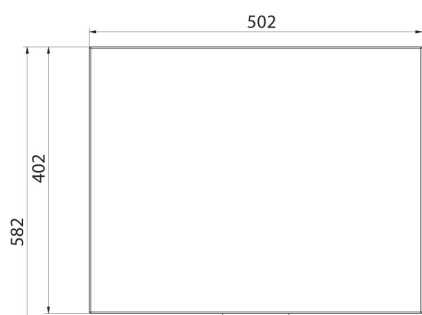



C315.C2.R



C315.C2.K

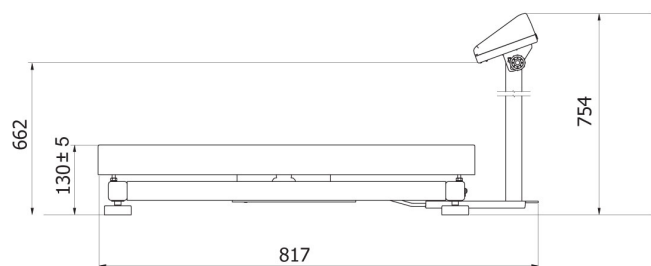

C315.C3.M

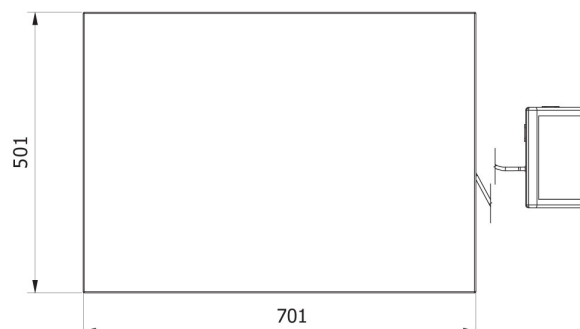

C315.C3.K