C315.100/200.OK-1 Personal Scale

WM-004-1032

More information on the website
mirror.radwag.com/en/info,w1,2DE



The drawings, photos and graphics used are for illustrative purposes only.

Functions

- Internal battery
- Peak hold
- GLP Procedures
- ALIBI Memory
- BMI

Datasheet

Metrological parameters	
Maximum capacity [Max]	100 / 200 kg
Readability [d]	50 / 100 g
Tare range	-200 kg
OIML Class	III
Physical parameters	
Display	4.3” LCD (backlit)
Cable length	2.5 m
Packaging dimensions W x D x H	500×420×160 mm
Net weight	6.5 kg

Physical parameters	
Gross weight	8 kg
Communication interface	
Communication interface	RS232
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz and battery
Power consumption max.	5 W
Operation time on batteries	up to 8 h
Environmental conditions	
Operating temperature	0 – +40 °C
Relative humidity	10% – 85% RH no condensation

According to MDR regulations, this scale is not a medical device.





Additional fee for verification


Accessories (Additional Fee)

RS 232 cables (scale - printer)
Cigarette lighter receptacle power supply cables
Displays
RS 232, RS 485 cables
RS 232 – Ethernet Converter
RS 232 – USB Converter
RS 232 – RS 485 Converter
Receipt Printer


Software (Additional Fee)

• RAD Key [WX-010-0005]
• Scale Editor 2.1 [WX-010-0173]
• R-Lab [WX-010-0080]


Device dimensions W x D x H

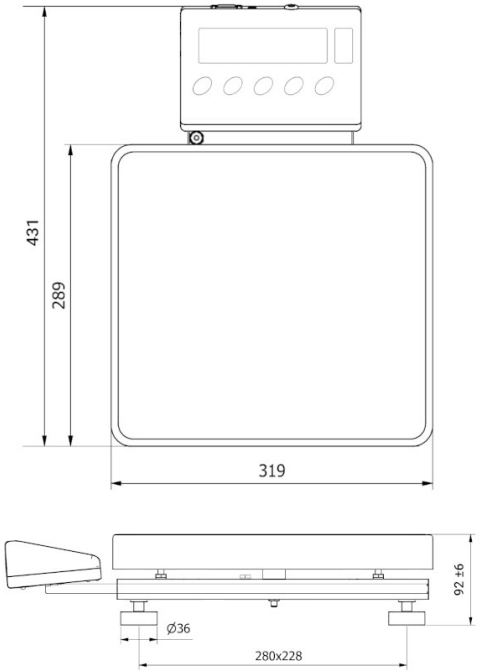

C315.OR

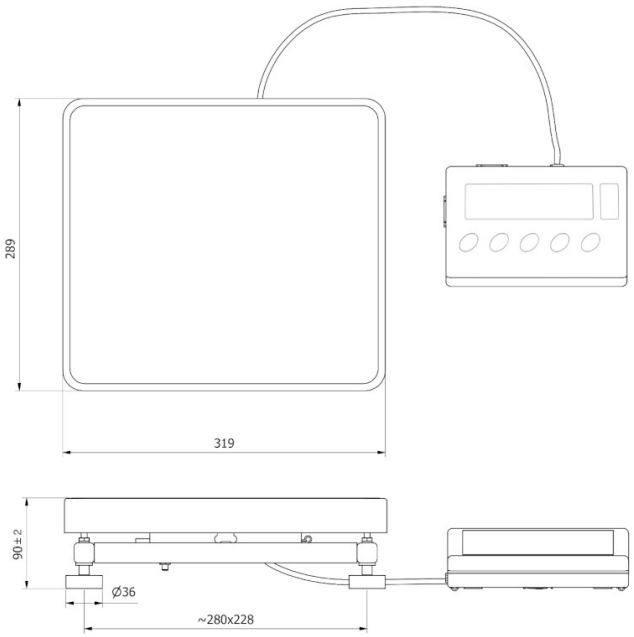

C315.OK

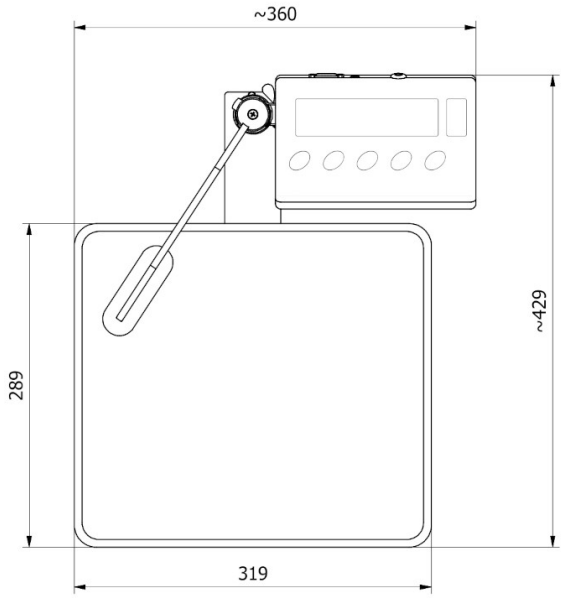

C315.OW

