



More information on the website
mirror.radwag.com/us/info,w1,303

WAY 2.5Y.KO Mass Comparator

WL-406-0043



The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

E1 Calibration Range	1 – 2 kg
E2 Calibration Range	500 g – 2 kg
F1 Calibration Range	100 g – 2 kg
F2 Calibration Range	10 g – 2 kg
M1 Calibration Range	1 g – 2 kg
M2 Calibration Range	1 g – 2 kg
Maximum capacity [Max]	2,3 kg
Readability [d]	0,1 mg
Standard repeatability [5% Max]	0,08 mg
Standard repeatability [Max]	0,1 mg
Permissible repeatability	0,2 mg
Linearity	±0,5 mg
Eccentricity (tested load)	0 mg*
Electric compensation range	-50 g – +300 g
Stabilization time	20 s
Adjustment	internal (automatic)

Physical parameters	
Display	10" graphic colour touchscreen
Weighing pan dimensions	ø70 mm
Weighing device dimensions	385×203×525 mm
Controlling device dimensions	249×170×72 mm
Anti-draft chamber dimensions	660×470×700 mm
Packaging dimensions W x D x H	945×820×1260 mm
Chamber packaging size	820×850×630 mm
Net weight	39,5 kg
Gross weight	59,5 kg
Construction	
Supplementary weights	internal (automatic)
Supplementary weights external	2×100 g
Communication interface	2×USB-A, USB-C, RS 232 (COM3), HDMI, Ethernet, Wi-Fi, Hotspot
Operating temperature	+15 – +30 °C
Operating temperature change rate	±0,5 °C / 12 h (±0,3 °C / 4 h)
Relative humidity	40% – 60%
Relative humidity change rate	±3% / 4 h

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.




Accessories (Additional Fee)

Suspended Self-Centring Weighing Pan for WAY 5Y.KO Manual Mass Comparator	RS 232, RS 485 cables
RFID Tags	Label Printers
Antivibration tables	THBR 2.0 System - Ambient Conditions Monitoring
Additional modules	Receipt Printer
Protective cover for balances	Fingerprint Reader
Barcode scanners	RS 232 cables (scale - printer)


Software (Additional Fee)

• RAD Key [WX-010-0005]	• RMCS Lite [WX-010-0164]
• RMCS System Network Management of Calibration Process [WX-010-0048]	


Device dimensions W x D x H

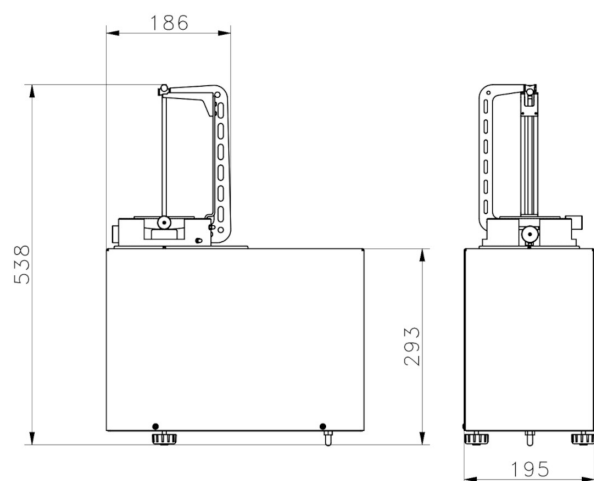


WAY 5.5Y.KO

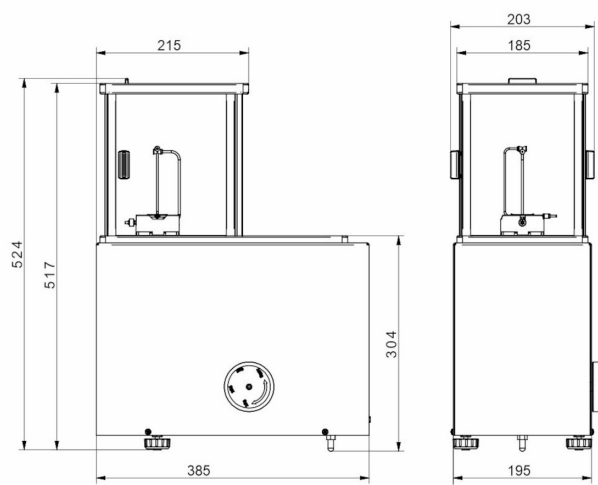


WAY 100.5Y.KO

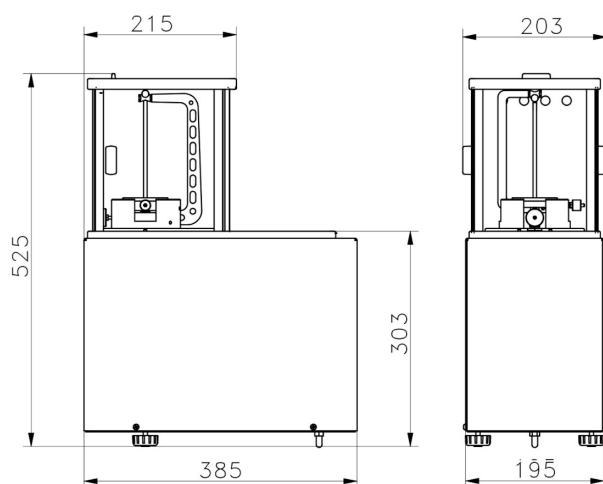

WAY 1.5Y.KO
WAY 2.5Y.KO
WAY 200.5Y.KO
WAY 500.5Y.KO

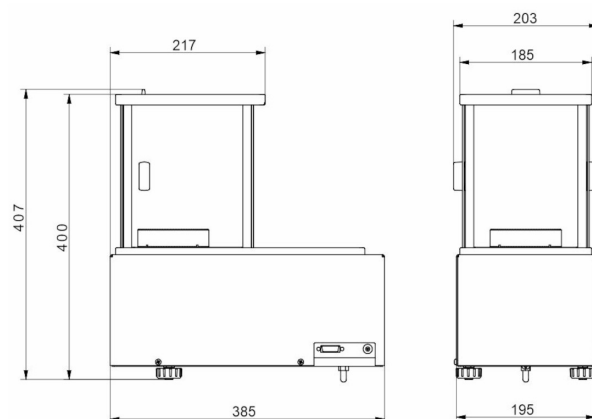

WAY 1200.5Y.KO

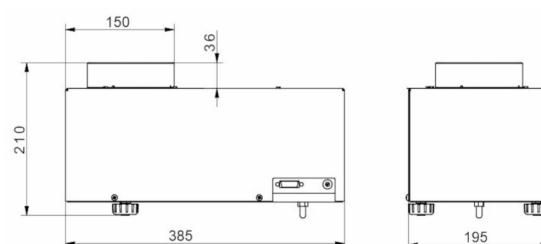

WAY 5100.5Y.KO