radwag.com

# Basamento ad una cella di carico HX5.EX-1.60.HR3/5

WW-007-0016

More information on the website
mirror.radwag.com/it/info,w1,5ED

The drawings, photos and graphics used are for illustrative purposes only.

## Funzioni

- Labelling
- Plus/Minus Control
- Percent Weighing
- Parts counting
- Newton unit measurement
- Statistics
- GLP Procedures
- Replaceable unit
- ALIBI Memory

## Specifiche

| Parametri metrologici | |
|---|---|
| Portata massima [Max] | 60 kg |
| Portata minima [Min] | 400 g |
| Divisione [d] | 20 g |
| Intervallo di verifica della bilancia [e] | 20 g |
| Campo di tara | -60 kg |
| Classe OIML | III |

| | |
|---|---|
| **Parametri fisici** | |
| Display | 5” graphic colour |
| Lunghezza del cavo | 2,5 m |
| Dimensione piatto | 400×600 mm |
| Dimensioni del pacco L x P x A | 490×680×450 mm |
| **Costruzione** | |
| Punteggio IP | IP 66 / 67 / 69 construction, IP 66 / 68 terminal |
| Certificazione ATEX | II 2G Ex ib IIC T4 Gb<br>II 2D Ex ib IIIC T135°C Db |
| Certificazione IECEx | Ex ib IIC T4 Gb<br>Ex ib IIIC T135°C Db |
| Costruzione | Stainless steel AISI316 |
| Materiale da pesata | Stainless steel AISI316 |
| **Interfaccia di comunicazione** | |
| Interfaccia | 2×RS232, RS485 |
| **Parametri elettrici** | |
| Alimentatore | 100 – 240 V AC 50/60 Hz |
| Massimo assorbimento elettrico | 15 W |
| **Environmental conditions** | |
| Ambiente di lavoro | -10 – +40 °C |
| Umidità relativa | 10% – 85% RH no condensation |
| Indicatore | PUE HX5.EX-1 |

Additional fee for verification

## Accessori (Additional Fee)

Moduli di comunicazione
Alimentatore a sicurezza intrinseca per bilance EX per alimentare il misuratore PUE HX5.EX

Stampanti di ricevuta

## Software (Additional Fee)

- E2R Weighing [WX-010-0099]
- Editore di etichette R02 [WX-010-0094]
- R-LAB [WX-010-0080]
- Software „Development Studio” RADWAG [WX-010-0104]
- RAD Key [WX-010-0005]
- „Alibi Reader” PC Software [WX-010-0114]
- Editore per sistemi di pesatura 2.1 [WX-010-0173]

# Device dimensions L x P x A

| Scale type | A1 | A2 | B |
|---|---|---|---|
| HX5.EX-1.HR2 | 250 | 300 | 103±3 |
| HX5.EX-1.HR3 | 410 | 410 | 98±2 |
| HX5.EX-1.HR4 | 500 | 500 | 155±5 |
| HX5.EX-1.HR3/5 | 400 | 600 | 155±5 |
| HX5.EX-1.HR5 | 600 | 600 | 155±5 |

Dimensions in mm

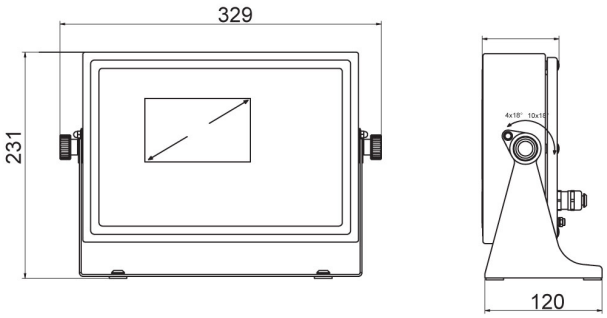


PUE HX5.EX-1

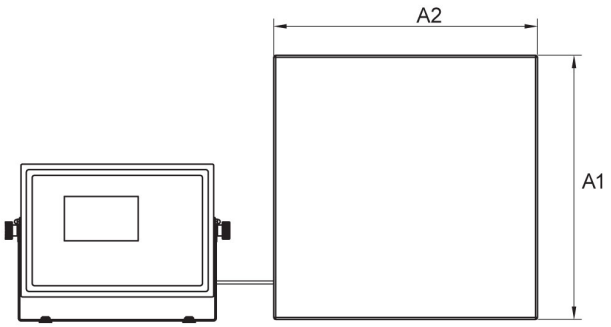


Platform H