



More information on the website  
[mirror.radwag.com/us/info,w1,5W1](http://mirror.radwag.com/us/info,w1,5W1)

# WTC 2000 Precision Balance

WL-210-0001



The drawings, photos and graphics used are for illustrative purposes only.

## Functions

-  Plus/Minus Control
-  Percent Weighing
-  Parts counting
-  Peak hold
-  GLP Procedures
-  ALIBI Memory

## Datasheet

Maximum capacity [Max]	2000 g
Readability [d]	0,01 g
Tare range	-2000 g
Repeatability	0,01 g
Linearity	±0,03 g
Stabilization time	2 s
Adjustment	external
<b>Physical parameters</b>	
Leveling system	manual

Physical parameters	
Display	4,3" LCD (backlit)
Weighing pan dimensions	128×128 mm
Packaging dimensions W x D x H	330×230×140 mm
Net weight	1,17 kg
Gross weight	2 kg
Construction	
Protection class	IP 43
Communication interface	RS232, USB-A, USB-B
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max
Operation time on batteries	15 h (average time)
Operating temperature	+15 – +35 °C
Relative humidity	10% – 85% RH no condensation



## Accessories (Additional Fee)

Antivibration tables  
 Power Adapters  
 RS 232 cables (scale - printer)  
 Cigarette lighter receptacle power supply cables



Displays  
 RS 232, RS 485 cables  
 Receipt Printer

## Software (Additional Fee)

- RAD Key [WX-010-0005]
- Scale Editor - EWAG 2.1 [WX-010-0173]

- Alibi Reader PC Software [WX-010-0114]

## Device dimensions W x D x H

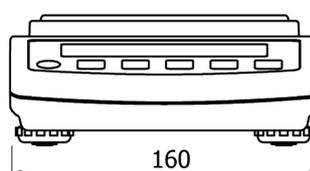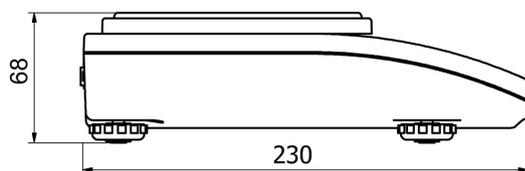

WTC:  $d = 0.01 \text{ g}$ ,  $d = 0.1 \text{ g}$