



More information on the website  
[mirror.radwag.com/en/info,w1,6DL](http://mirror.radwag.com/en/info,w1,6DL)

# High Resolution Platforms PL.62.2.HRP.H

WX-009-1160



The drawings, photos and graphics used are for illustrative purposes only.

## Datasheet

Metrological parameters	
Maximum capacity [Max]	62 kg
Preload range	30 kg
Readability [d]	0.1 g
Tare range	-62 kg
Repeatability	0.08 g
Linearity	±0.4 g
Adjustment	internal (automatic)
Construction	
Protection class	IP 66 / 67
Construction	Stainless steel AISI304
Weighing pan material	Stainless steel AISI304
Communication interface	
Communication interface	RS232, RS485, Ethernet

Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz
Environmental conditions	
Operating temperature	+10 – +40 °C
Relative humidity	15% – 80%
Physical parameters	
Weighing pan dimensions	500×500 mm
Packaging dimensions W x D x H	610×710×275 mm
Net weight	30 kg
Gross weight	35 kg



## Accessories (Additional Fee)

Ethernet cables (scale - Ethernet)  
 PUE 7.1 Weighing Terminal  
 RS 232, RS 485 cables  
 IN/OUT Cables




Powerbanks  
 PUE HY10 Weighing Terminal  
 Ex-Scale-Intended Intrinsically Safe Power Supply for PUE HX5.EX  
 Weighing Terminal  
 RS 232 – USB Converter

## Software (Additional Fee)

- MWMH Manager [WX-010-0103]
- RADWAG Development Studio [WX-010-0104]

- RAD Key [WX-010-0005]

## Device dimensions W x D x H

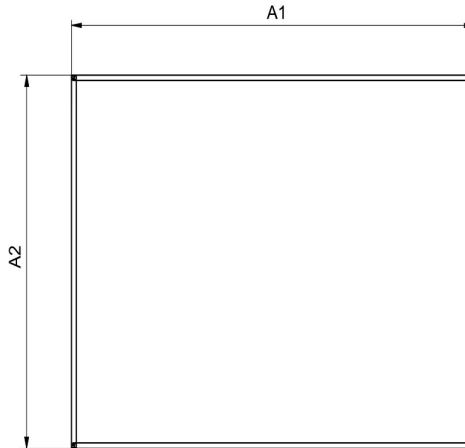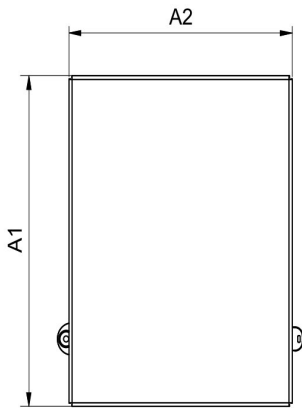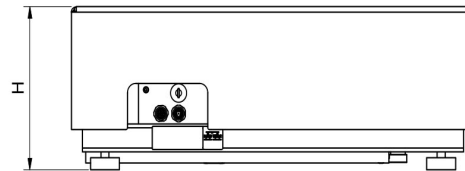

PL.16 - 32.HRP.H

PL.62-2000.HRP.H

Scale type	A1	A2	H
PL.(16-32).HRP.H	360	280	180±5
PL.(62-150).HRP.H	500	400	180±5
PL.150.2.HRP.H	500	500	180±5
PL.(150.1-300).HRP.H	800	600	180±5
PL.(300.1-1100).HRP.H	1000	800	180±5
PL.(2000).HRP.H	1250	1000	180±5

Dimensions in mm