radwag.com

Plataforma de pesagem C315.4.1500.C9

WP-230-0017

More information on the website
mirror.radwag.com/br/info,w1,6MC



The drawings, photos and graphics used are for illustrative purposes only.

Funções

- Plus/Minus Control
- Percent Weighing
- Totalizing
- Parts counting
- Internal battery
- Peak hold
- Newton unit measurement
- GLP Procedures
- Animal weighing
- ALIBI Memory

Ficha Técnica

Parâmetros metrológicos	
Capacidade máxima [máx]	1500 kg
Carga mínima	10 kg
Resolução [d]	0,5 kg
Unidade de verificação [e]	0,5 kg
Faixa de tara	-1500 kg
Resolução máxima para plataforma não verificada	100 g
Classe OIML	III

Parâmetros físicos	
Display	4,3” LCD (retroiluminado)
Comprimento até cabo	3 m
Dimensões até prato de pesagem	1500×1500 mm
Altura da plataforma de pesagem	120 ± 10 mm
Dimensões da embalagem L x P x A	1600×1600×500 mm
Plataforma com indicador	160 kg
Construção	
Classe de proteção	IP 65 construção, IP 67 célula, IP 43 terminal
Interface de comunicação	
Interface de comunicação	RS232
Interfaces opcionais	RS232
Parâmetros elétricos	
Fonte de alimentação	100 – 240 V AC 50/60 Hz e bateria
Consumo de energia máx.	5 W
Tempo de operação com baterias	max 8h
Condições ambientais	
Temperatura de operação	-10 – +40 °C
Umidade relativa	10% – 85% RH sem condensação





Additional fee for verification


Acessórios (Additional Fee)


Adaptadores de energia
Cabos de alimentação para acendedor de cigarro automotivo
Displays
RS 232, RS 485 cabos
Conversor RS 232 – Ethernet
RS 232 – Conversor USB
Cabos RS 232 (plataforma - impressora)
Conversor RS 232 – RS 485
Impressora de recibos

Software (Additional Fee)

• RAD Key [WX-010-0005]
• R-Lab [WX-010-0080]

Dimensões do dispositivo L x P x A



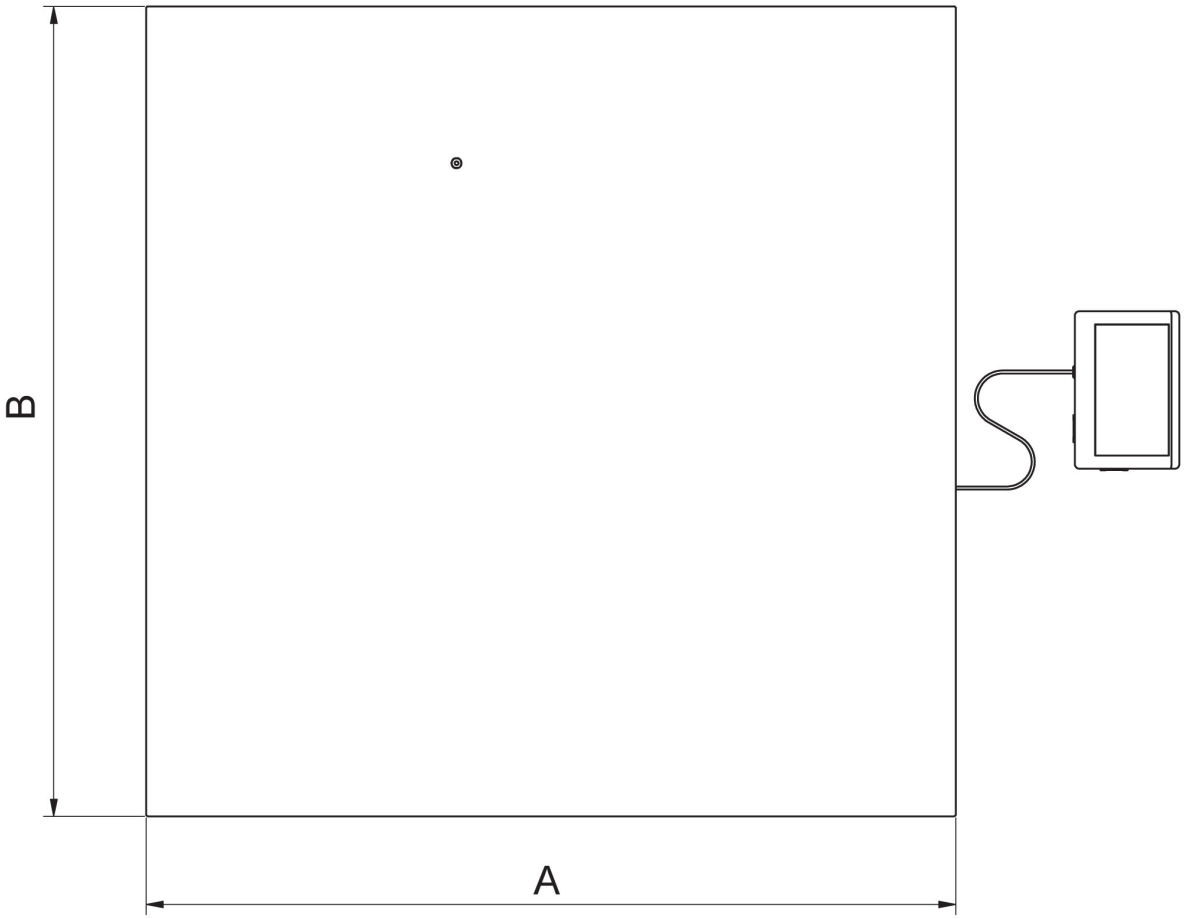

	A	B	H
C6	800	800	120 ±10
C7	1000	1000	120 ±10
C8	1200	1200	120 ±10
C8/9	1200	1500	120 ±10
C9	1500	1500	120 ±10
6000.C9	1500	1500	160 ±10