
radwag.com

H315.4.3000.C11 Platform Scale

WP-231-0003

More information on the website
mirror.radwag.com/en/info,w1,6R4

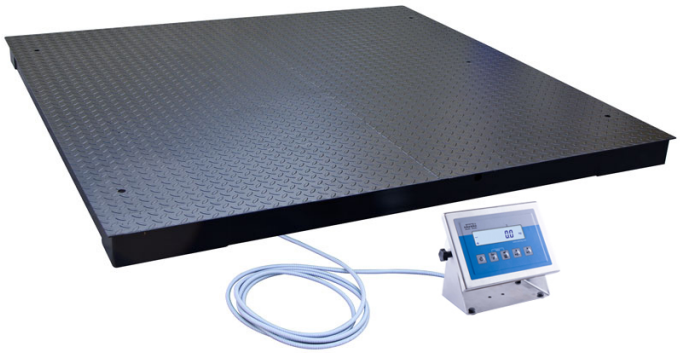

The drawings, photos and graphics used are for illustrative purposes only.

Functions

- Plus/Minus Control
- Percent Weighing
- Totalizing
- Parts counting
- Internal battery
- Peak hold
- Newton unit measurement
- Animal weighing

Datasheet

Metrological parameters	
Maximum capacity [Max]	3000 kg
Minimum load	20 kg
Readability [d]	1 kg
Verification unit [e]	1 kg
Tare range	-3000 kg
Max readability for non-verified scale	200 g
OIML Class	III
Physical parameters	
Display	4.3” LCD (backlit)

Physical parameters	
Cable length	3 m
Weighing pan dimensions	2000×2000 mm
Weighing platform height	120 ± 10 mm
Packaging dimensions W x D x H	2100×2100×550 mm
Scale mass with indicator	290 kg
Construction	
Protection class	IP 65 construction, IP 67 cell, IP 66 / 67 / 69 terminal
Communication interface	
Communication interface	RS232, USB
Optional interfaces	RS232 or RS485 or 4IN/4OUT or Ethernet or analog output 4-20 mA
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz
Optional power supply	internal rechargeable battery
Operation time on batteries	max 7h
Environmental conditions	
Operating temperature	-10 – +40 °C
Relative humidity	10% – 85% RH no condensation





Additional fee for verification


Accessories (Additional Fee)

AP2-4 Current Loop Unit
RS 232 cables (scale - printer)
Frame for embedded scales
Displays
Ethernet cables (scale - Ethernet)
RS 232, RS 485 cables
Ramps
Power Adapters
RS 232 – Ethernet Converter
USB adatper
Receipt Printer
USB cable (scale - printer)
Stands, wall mounting kits and mounting brackets
RS 232 – USB Converter
RS 232 – RS 485 Converter

Software (Additional Fee)

• RAD Key [WX-010-0005]
• Scale Editor 2.1 [WX-010-0173]
• R-Lab [WX-010-0080]