radwag.com

C315.4.600.C7 Platform Scale

WP-230-0007

More information on the website
mirror.radwag.com/en/info,w1,791



The drawings, photos and graphics used are for illustrative purposes only.

Functions

- Plus/Minus Control
- Percent Weighing
- Totalizing
- Parts counting
- Internal battery
- Peak hold
- Newton unit measurement
- GLP Procedures
- Animal weighing
- ALIBI Memory

Datasheet

Metrological parameters	
Maximum capacity [Max]	600 kg
Minimum load	4 kg
Readability [d]	0.2 kg
Verification unit [e]	0.2 kg
Tare range	-600 kg
Max readability for non-verified scale	50 g
OIML Class	III

Physical parameters	
Display	4.3” LCD (backlit)
Cable length	3 m
Weighing pan dimensions	1000×1000 mm
Weighing platform height	120 ± 10 mm
Packaging dimensions W x D x H	1100×1000×500 mm
Scale mass with indicator	80 kg
Construction	
Protection class	IP 65 construction, IP 67 cell, IP 43 terminal
Communication interface	
Communication interface	RS232
Optional interfaces	RS232
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz and battery
Power consumption max.	5 W
Operation time on batteries	max 8h
Environmental conditions	
Operating temperature	-10 – +40 °C
Relative humidity	10% – 85% RH no condensation





Additional fee for verification


Accessories (Additional Fee)


Power Adapters
RS 232 cables (scale - printer)
Stands, wall mounting kits and mounting brackets
Cigarette lighter receptacle power supply cables
Displays
Ramps
RS 232, RS 485 cables
RS 232 – Ethernet Converter
Frame for embedded scales
AP2-1 Current Loop Unit
RS 232 – USB Converter
RS 232 – RS 485 Converter
Receipt Printer

Software (Additional Fee)

• RAD Key [WX-010-0005]
• Scale Editor 2.1 [WX-010-0173]
• R-Lab [WX-010-0080]

Device dimensions W x D x H



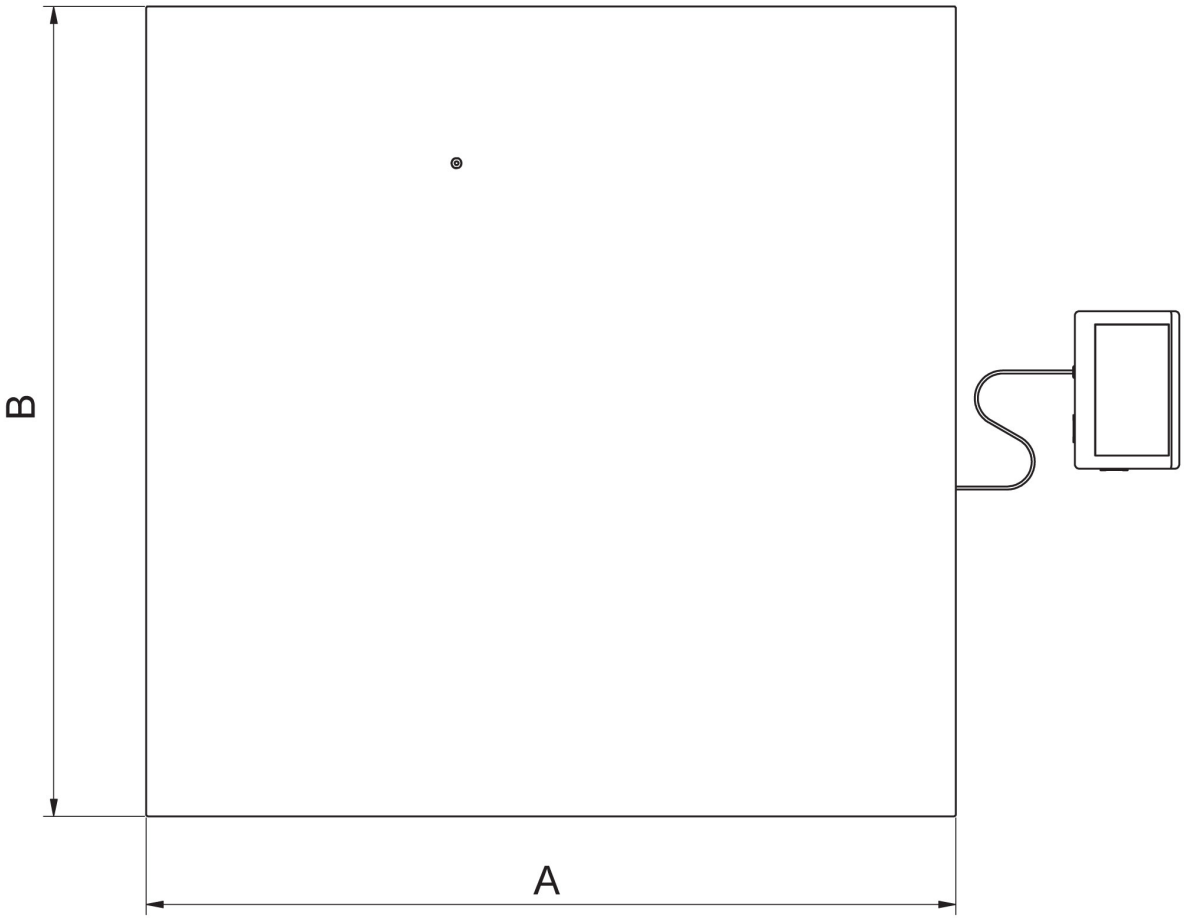

	A	B	H
C6	800	800	120 ±10
C7	1000	1000	120 ±10
C8	1200	1200	120 ±10
C8/9	1200	1500	120 ±10
C9	1500	1500	120 ±10
6000.C9	1500	1500	160 ±10