



H315.2K.300/600 Overhead Track Scale

WP-238-1001

More information on the website
mirror.radwag.com/us/info,w1,799



The drawings, photos and graphics used are for illustrative purposes only.

Functions

 Plus/Minus Control

 Percent Weighing

 Totalizing

 Parts counting

 Internal battery

 Peak hold

 Newton unit measurement

 Animal weighing

Datasheet

Maximum capacity [Max]	300 / 600 kg
Minimum load	2 kg
Readability [d]	0,1 / 0,2 kg
Tare range	-600 kg
OIML Class	III
Physical parameters	
Display	4,3" LCD (backlit)
Detection line span	L= 800 mm (min. 200 mm)

Construction	
Protection class	IP 66 / 67 construction, IP 66 / 67 / 69 terminal
Construction	galvanized
Communication interface	RS232, USB
Optional interfaces	RS232 or RS485 or 4IN/4OUT or Ethernet or analog output 4-20 mA
Power supply	100 – 240 V AC 50/60 Hz
Optional power supply	internal rechargeable battery
Operation time on batteries	max 7h
Operating temperature	-10 – +40 °C
Relative humidity	10% – 85% RH no condensation



Additional fee for verification




Accessories (Additional Fee)

RS 232 cables (scale - printer)	USB adatper
Displays	Receipt Printer
RS 232 cables (scale - Ethernet)	USB cable (scale - printer)
RS 232, RS 485 cables	Stands, wall mounting kits and mounting brackets
Power Adapters	RS 232 – USB Converter
RS 232 – Ethernet Converter	

Software (Additional Fee)

- RAD Key [WX-010-0005]
- Scale Editor - EWAG 2.1 [WX-010-0173]


Device dimensions W x D x H

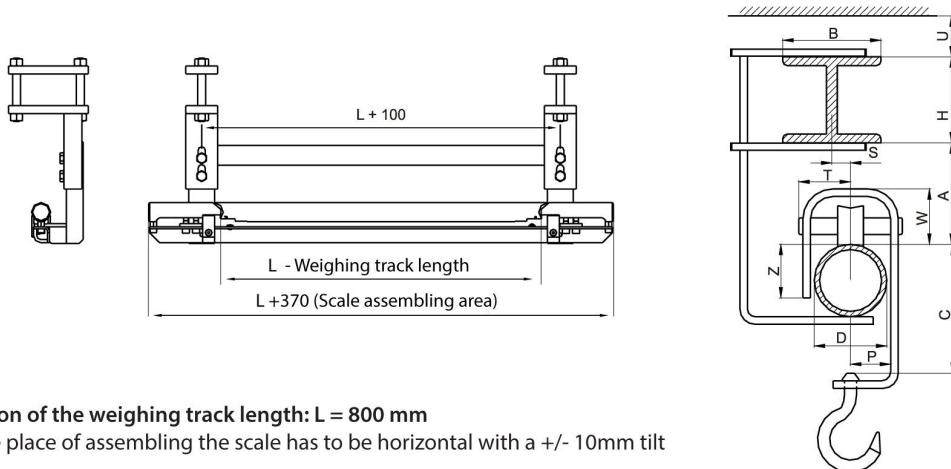

CAUTION

- Standard version of the weighing track length: $L = 800 \text{ mm}$
- The truck in the place of assembling the scale has to be horizontal with a $+/ - 10\text{mm}$ tilt limit
- The dimensions bearing the letters are to be agreed with contractor manufacturing Z dimension; the dimensions can be omitted if the following relation is fulfilled: $Z \leq 80\% D$

Dimensions of an overhead track scale with a shaft of $\varnothing 60$ (standard version)

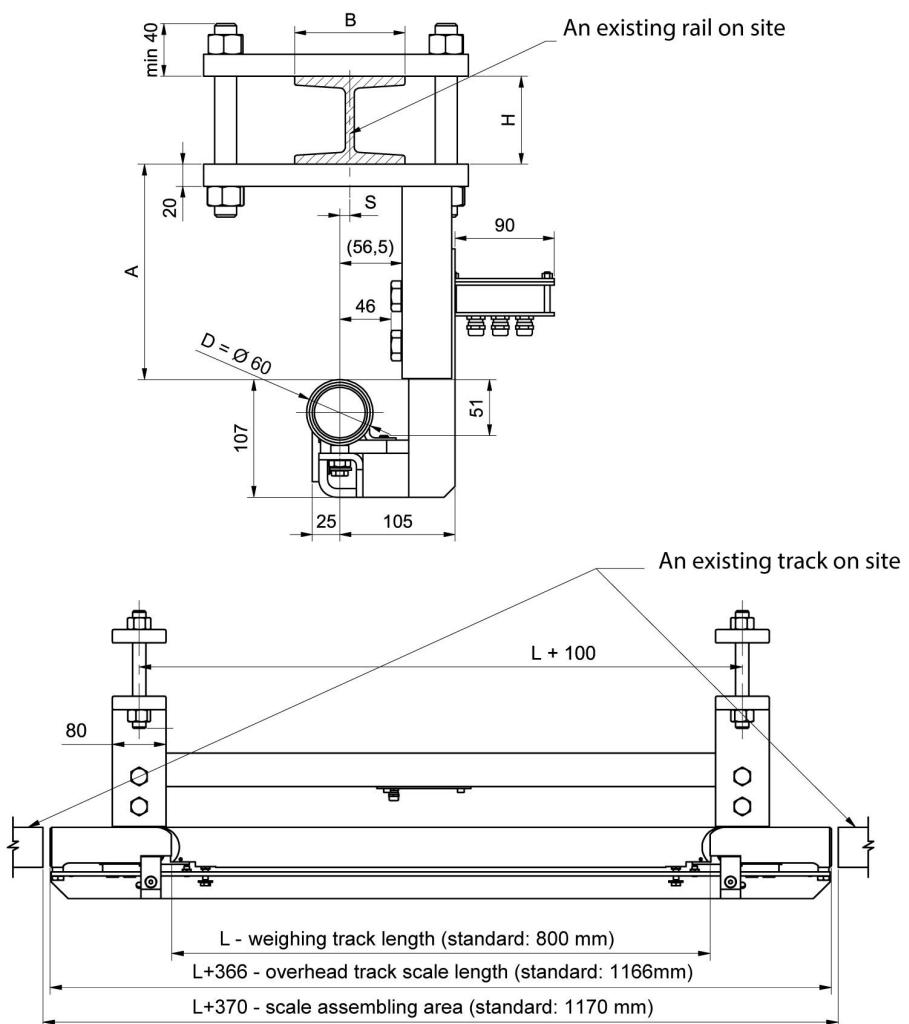

Minimum track clearance: $A = 90 \text{ mm}$.

Weighing track length: $200 \leq L \leq 800 \text{ mm}$. As a standard: $L=800 \text{ mm}$.

Maximum capacity: **600 kg**.