



More information on the website
mirror.radwag.com/us/info,w1,9FZ

PM01.EX-1 intrinsically safe power supply intended for EX scale



The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

Physical parameters	
Cable length	3 m
Device dimensions	216×174×64 mm
Construction	
Protection class	IP 66 / 68
Housing	Stainless steel
ATEX Certification	II 2G Ex eb mb [ib] IIC T4 Gb II 2D Ex tb [ib] IIIC T70°C Db
Working in zones	1, 2 (gases); 21, 22 (dusts)
Power supply	
Power supply	100 – 240 V AC 50/60 Hz
Power consumption max.	15 W
Operating conditions	
Operating temperature	-20 – +40 °C
Storage temperature	-20 – +60 °C
Relative humidity	10% – 85% RH no condensation






Compatible with

HX5.EX-1.4P2 H Stainless steel Beam Scales
HX5.EX-1 HR Stainless Steel 1-Load-Cell Platform Scales
HX5.EX-1.4P2 C Beam Scales
HX5.EX-1.4N Stainless Steel Ramp Scales
HX5.EX-1.4 C 4-Load-Cell Platform Scales
HX5.EX-1.4P H Stainless steel pallet scales

HX5.EX-1.4 H/Z Stainless steel platform scales, pit version
HX5.EX-1 C 1 Load Cell Platform Scales
HX5.EX-1 H Waterproof Platform Scales
PUE HX5.EX Weighing Terminal
HX5.EX-1.4 H Stainless Steel 4-Load-Cell Platform Scales
HX5.EX-1.4P C Pallet scales

Device dimensions

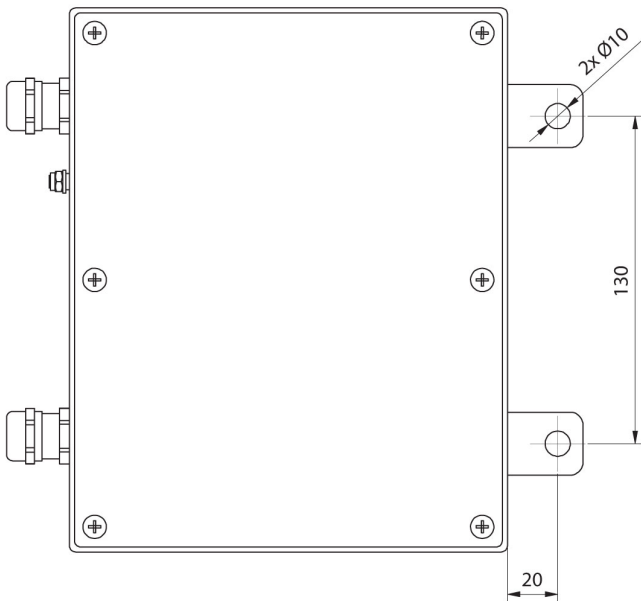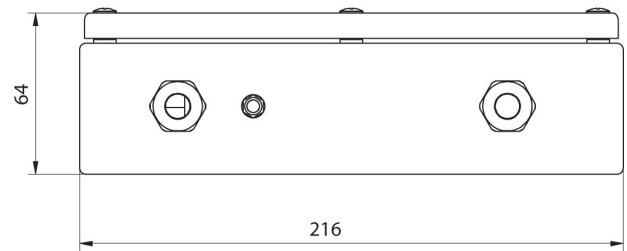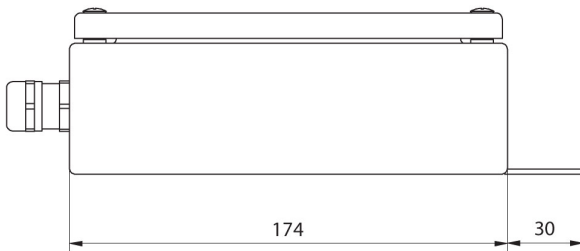

PM01.EX