
radwag.com

# WLC 0.2.X7上皿天秤

WL-227-0001

More information on the website
mirror.radwag.com/ja/info,w1,ARZ

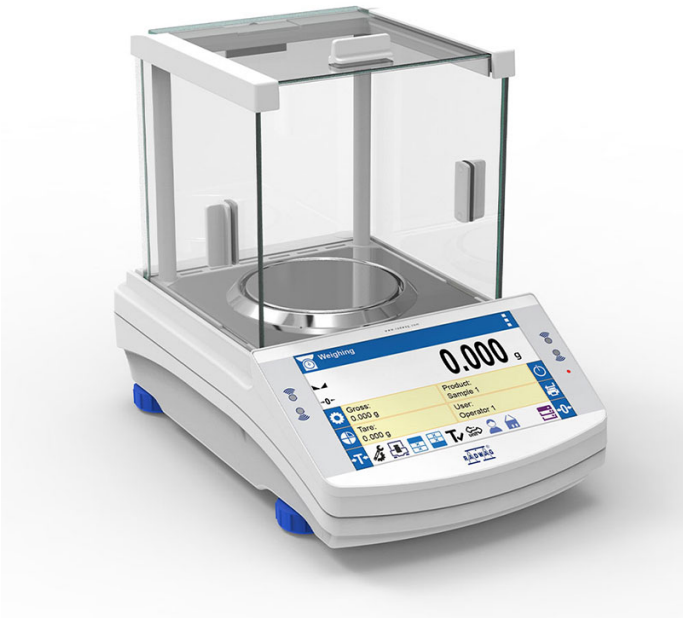


The drawings, photos and graphics used are for illustrative purposes only.

## 機能

- Autotest
- Dosing
- Plus/Minus Control
- Percent Weighing
- Parts counting
- Peak hold
- Formulation
- Newton unit measurement
- Statistics
- Checkweighing
- IR sensors
- GLP Procedures
- Animal weighing
- Density determination
- Ambient conditions monitoring
- Replaceable unit
- Statistical Quality Control
- ALIBI Memory
- Mass for titrator
- Wi-Fi

## データシート

| 計測パラメータ | |
|---|---|
| 最大ひょう量 [Max] | 0,2 kg |
| 最小表示 [d] | 0,001 g |
| 法定計量時の単位 [e] | - |
| 風袋範囲 | -0,2 kg |

| | |
|---|---|
| **計測パラメータ** | |
| **繰返し性** | 0,0014 g |
| 直線性 | ±0,003 g |
| 安定化時間 | 2 s |
| 調整 | 内部 (自動) |
| **物理的パラメータ** | |
| **レベリングシステム** | 手動 |
| **ディスプレイ** | 7" グラフィック カラー タッチスクリーン |
| 計量皿寸法 | ø100 mm |
| 梱包寸法 幅x奥行x高さ | 490×400×520 mm |
| 正味重量 | 3,6 kg |
| 総重量 | 5,1 kg |
| **工事中** | |
| **保護クラス** | IP 43 |
| **コンポーネントとソフトウェア** | |
| **データベース容量** | 製品、ユーザー、包装、顧客、配合、配合レポート、周囲条件、計量、アリバイ・メモリー |
| **通信インターフェース** | |
| **通信インターフェース** | 2×RS232[1], USB-A, USB-B, Ethernet, Wi-Fi |
| **電気的パラメータ** | |
| 電源 | アダプター: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A<br>バランス: 10 – 15VDC 0,6A max |
| **環境条件** | |
| 動作温度 | +10 – +40 °C |

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

# アクセサリ (Additional Fee)

防振台
**電源アダプタ**
RS 232 ケーブル (はかり - プリンタ)
**シガーライターソケット電源ケーブル**
USB cable (はかり - プリンタ)
**バーコードスキャナ**
**底部吊り下げ計量**
RS 232、RS 485 ケーブル
**ディスプレイ**
**レシートプリンタ**
RS 232 – RS 485 コンバータ

# ソフトウェア (Additional Fee)

- RAD Key [WX-010-0005]
- R-Lab [WX-010-0080]
- RADWAG Development Studio [WX-010-0104]
- Alibi Reader [WX-010-0114]
- Scale Editor 2.1 [WX-010-0173]

# デバイスの寸法 幅x奥行x高さ

