



More information on the website
mirror.radwag.com/en/info,w1,AUM

H315.4N.300/600.H2.LD Stainless Steel Ramp Scale

WP-234-1009



The drawings, photos and graphics used are for illustrative purposes only.

Functions

 Plus/Minus Control

 Percent Weighing

 Totalizing

 Parts counting

 Internal battery

 Peak hold

 Newton unit measurement

 Animal weighing

Datasheet

| Metrological parameters | |
|-------------------------|--------------------|
| Maximum capacity [Max] | 300 / 600 kg |
| Minimum load | 2 kg |
| Readability [d] | 100 / 200 g |
| Verification unit [e] | 100 / 200 g |
| Tare range | -600 kg |
| OIML Class | III |
| Physical parameters | |
| Display | 4.3" LCD (backlit) |

| Physical parameters | |
|--------------------------------|---|
| Cable length | 3 m |
| Weighing pan dimensions | 1100×1200 mm |
| Packaging dimensions W x D x H | 1640×1590×580 mm |
| Net weight | 175 kg |
| Gross weight | 281 kg |
| Construction | |
| Protection class | IP 66 / 69 construction, IP 66 / 67 / 69 terminal |
| Communication interface | |
| Communication interface | RS232, USB |
| Optional interfaces | RS232 or RS485 or 4IN/4OUT or Ethernet or analog output 4-20 mA |
| Electrical parameters | |
| Power supply | 100 – 240 V AC 50/60 Hz |
| Optional power supply | internal rechargeable battery |
| Operation time on batteries | max 7h |
| Environmental conditions | |
| Operating temperature | -10 – +40 °C |
| Relative humidity | 10% – 85% RH no condensation |



Additional fee for verification



Accessories (Additional Fee)

AP2-4 Current Loop Unit
 RS 232 cables (scale - printer)
 Displays
 Ethernet cables (scale - Ethernet)
 RS 232, RS 485 cables
 Power Adapters


RS 232 – Ethernet Converter
 USB adapter
 Receipt Printer
 USB cable (scale - printer)
 Stands, wall mounting kits and mounting brackets
 RS 232 – USB Converter

Software (Additional Fee)

• RAD Key [WX-010-0005]
 • Scale Editor 2.1 [WX-010-0173]

• R-Lab [WX-010-0080]

Device dimensions W x D x H

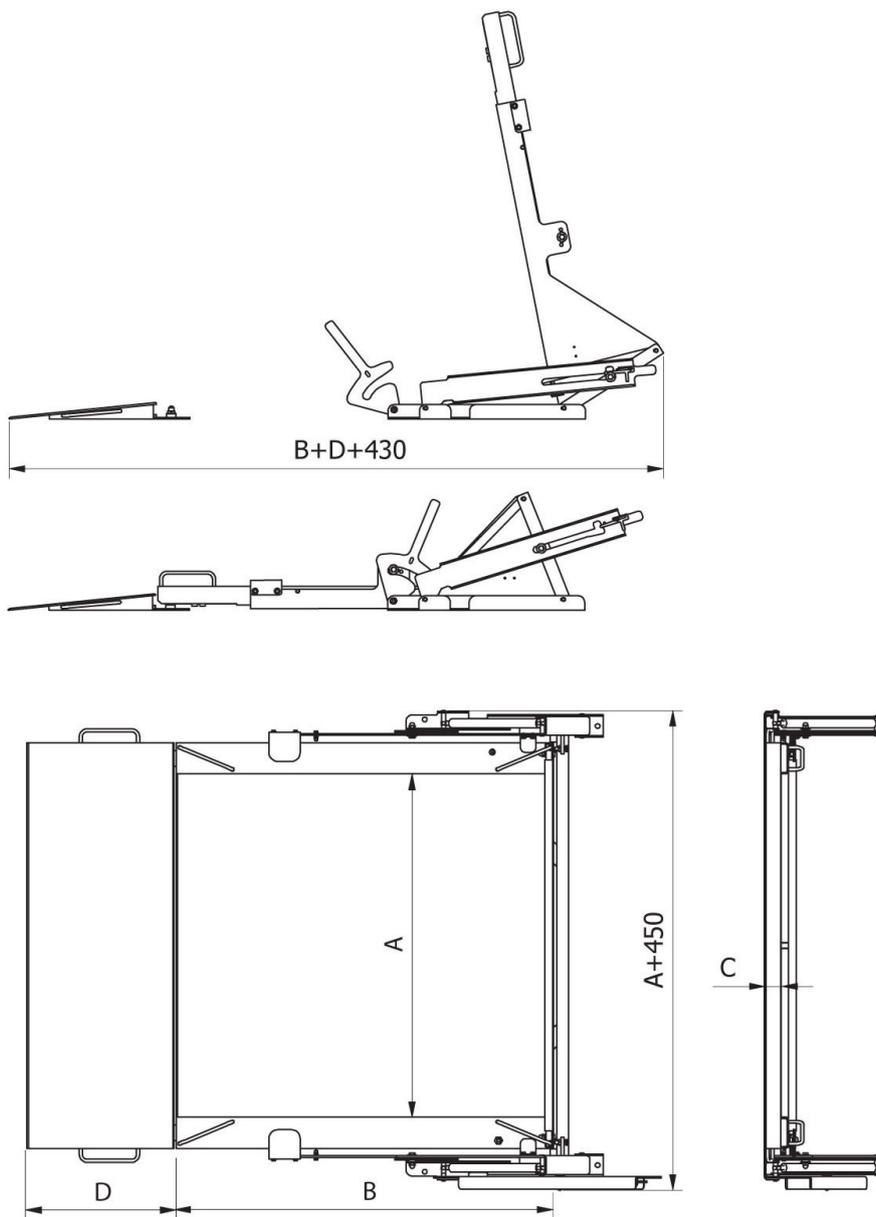

| | A [mm] | B [mm] | C [mm] | D [mm] |
|--------------------|--------|--------|--------|--------|
| H315.4N.150.H1.LD | 840 | 860 | 45 | 426 |
| H315.4N.300.H1.LD | 840 | 860 | 45 | 426 |
| H315.4N.600.H1.LD | 840 | 860 | 45 | 426 |
| H315.4N.150.H2.LD | 1100 | 1200 | 45 | 426 |
| H315.4N.300.H2.LD | 1100 | 1200 | 45 | 426 |
| H315.4N.600.H2.LD | 1100 | 1200 | 45 | 426 |
| H315.4N.300.H3.LD | 1200 | 1500 | 45 | 426 |
| H315.4N.600.H3.LD | 1200 | 1500 | 45 | 426 |
| H315.4N.1500.H2.LD | 1100 | 1200 | 52 | 476 |
| H315.4N.1500.H3.LD | 1200 | 1500 | 52 | 476 |
| H315.4N.300.H4.LD | 1500 | 1500 | 52 | 476 |
| H315.4N.600.H4.LD | 1500 | 1500 | 52 | 476 |
| H315.4N.1500.H4.LD | 1500 | 1500 | 52 | 476 |