




More information on the website  
[mirror.radwag.com/en/info,w1,BFH](http://mirror.radwag.com/en/info,w1,BFH)

# AK-4.10000.5Y Automatic Mass Comparators

WL-413-0021

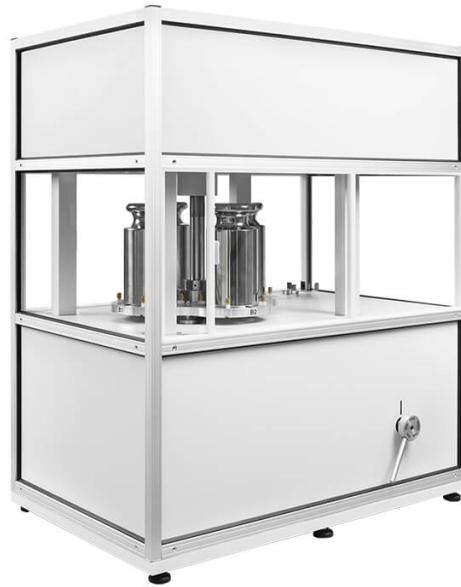

The drawings, photos and graphics used are for illustrative purposes only.

## Datasheet

Metrological parameters	
E0 Calibration Range	500 g – 10 kg *
E1 Calibration Range	500 g – 10 kg
E2 Calibration Range	500 g – 10 kg
F1 Calibration Range	500 g – 10 kg
F2 Calibration Range	500 g – 10 kg
Maximum capacity [Max]	10.1 kg
Readability [d]	0.01 mg
Standard repeatability [Max]	20 µg
Standard repeatability [5% Max]	15 µg
Permissible repeatability	40 µg
Linearity	±0.05 mg
Eccentricity (tested load)	0 mg
Electric compensation range	-10 g – +100 g
Stabilization time	30 s

Metrological parameters	
Adjustment	internal (automatic)
Physical parameters	
Display	10" graphic colour touchscreen
Weighing pan dimensions	ø100 mm
Weighing device dimensions	800×500×930 mm
Controlling device dimensions	249×170×72 mm
Packaging dimensions W x D x H	1000×900×685 mm
Chamber packaging size	1100×800×1150 mm
Net weight	91 kg
Gross weight	141 kg
Construction	
Supplementary weights	internal (automatic)
Supplementary weights internal	half automatic
Supplementary weights external	-
Communication interface	
Communication interface	2×USB-A, USB-C, RS 232 (COM3), HDMI, Ethernet, Wi-Fi, Hotspot
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz
Environmental conditions	
Operating temperature	+15 – +30 °C
Operating temperature change rate	±0.5 °C / 12 h (±0.3 °C / 4 h)
Relative humidity	40% – 60%
Relative humidity change rate	±5% / 12 h (3% / 4 h)

**Repeatability** is expressed as a standard deviation determined for 6 ABBA cycles. Standard deviation is experimentally determined under ambient conditions for calibration of E1 class mass standards specified in OIML R111 (Table C.1.) document.  
**E0 standard** determined from 1/5 limiting error according to OIML R111 for class E1.

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.




## Accessories (Additional Fee)

RFID Tags	RS 232, RS 485 cables
Antivibration Tables	THBR 2.0 System - Ambient Conditions Monitoring
Additional modules	Receipt Printer
Protective cover for balances	Fingerprint Reader
Barcode scanners	RS 232 cables (scale - printer)


## Software (Additional Fee)

- RAD Key [WX-010-0005]
- RMCS System Network Management of Calibration Process [WX-
- RMCS Lite [WX-010-0164]



## Device dimensions W x D x H

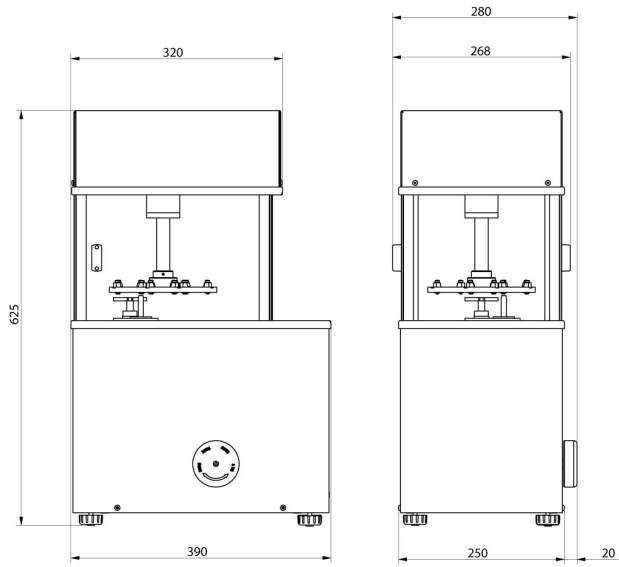

AK-4/100, AK-4/1000,  
AK-4/1000.1

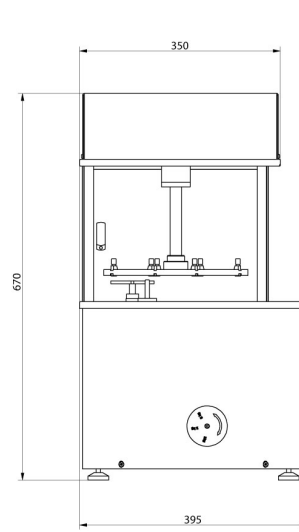

AK-4/2000, AK-4/5000,  
AK-4/5000.1

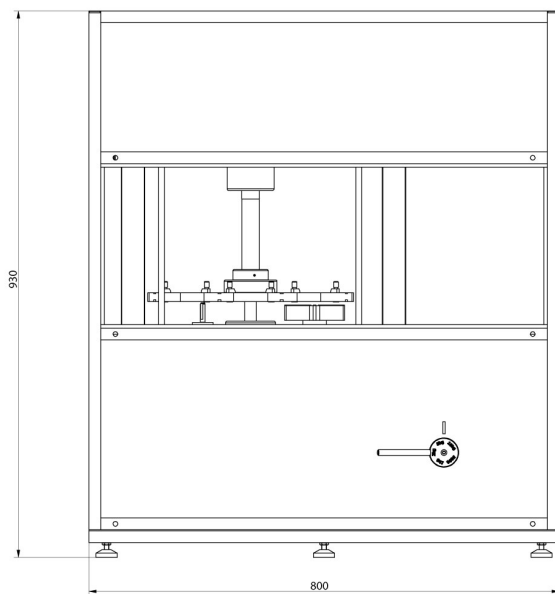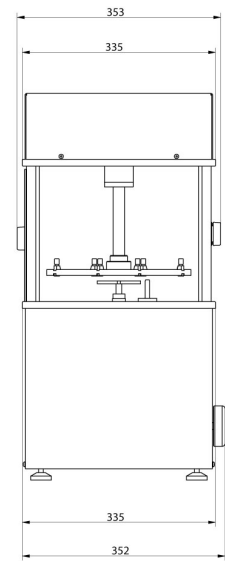

AK-4/10000, AK-4/16000

