radwag.com

MAS.220/440.Y Weighing Module

WX-016-1007

More information on the website
mirror.radwag.com/en/info,w1,BH4



The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

Metrological parameters	
Maximum capacity [Max]	220 / 440 g
Preload range	44 g
Readability [d]	0.1 / 1 mg
Repeatability	0.2 / 0.8 mg
Linearity	±0.5 / 1 mg
Warm-up time after connection to power	1 h
Stabilization time	2 s
Adjustment	internal
Construction	
Protection class	IP 43
Housing	aluminum
Weighing pan material	Stainless steel
Communication interface	
Communication interface	RS232, Ethernet TCP/IP

Communication interface	
Optional interfaces	RS485, 2 IN/2 OUT
Electrical parameters	
Power supply	12 – 24 V DC
Environmental conditions	
Operating temperature	+10 – +40 °C
Relative humidity	40% – 80%
Physical parameters	
Weighing pan dimensions	ø56 mm
Device dimensions W x D x H	254x127x138 mm
Packaging dimensions W x D x H	440×370×360 mm
Net weight	3.2 kg
Gross weight	5 kg




Accessories (Additional Fee)

DIN Interface Adapter

5Y Terminal

Device dimensions W x D x H

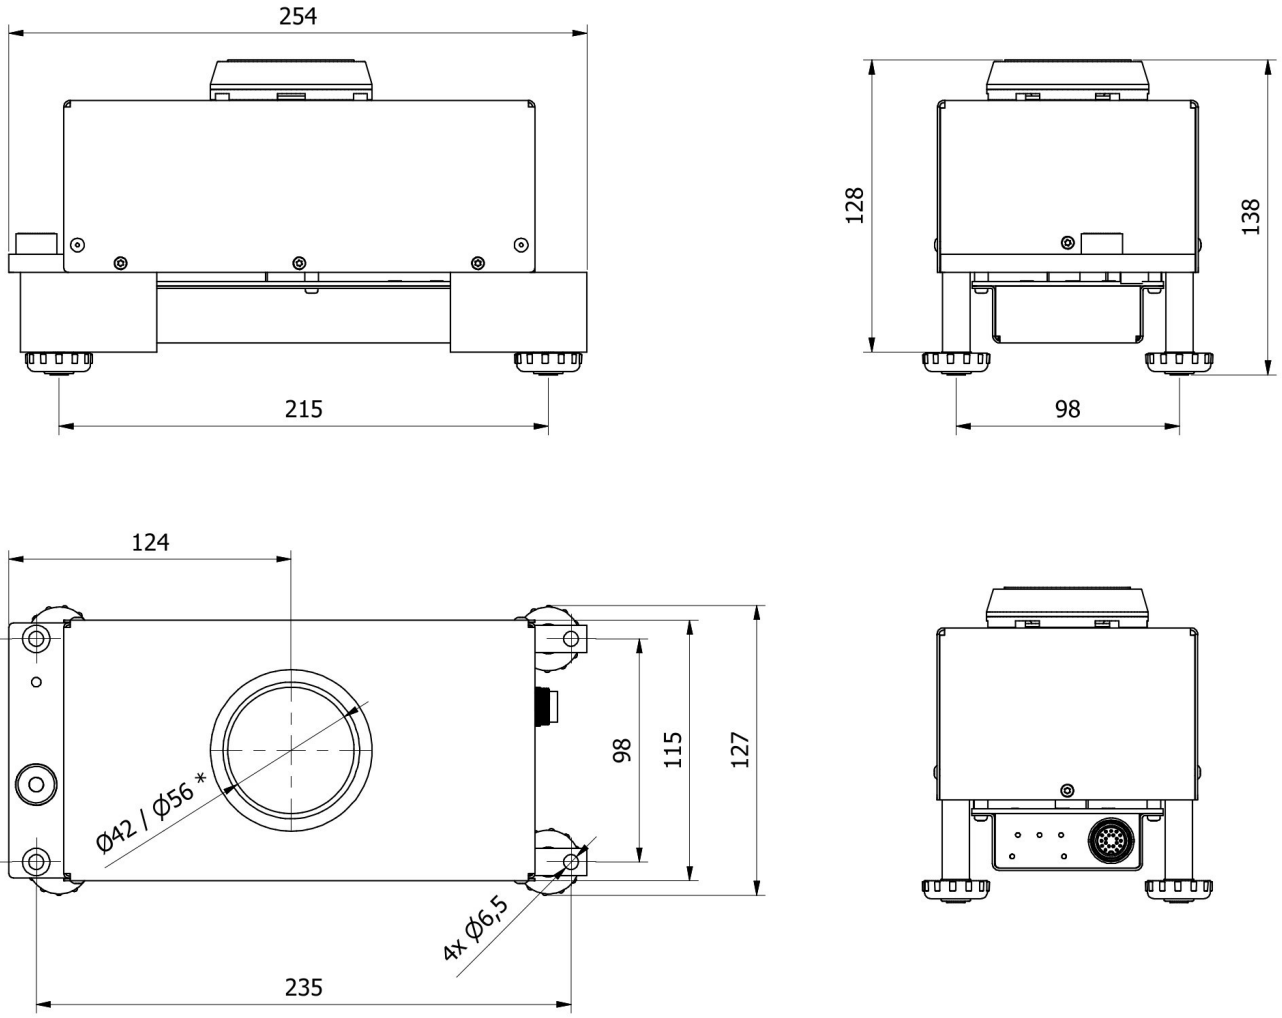

* - Ø42 - MAS.50.Y; MAS.80.Y; MAS.220.Y
- Ø56 - MAS.220/440.Y; MAS.640.Y; MAS.1000.Y