radwag.com

C32.60.PM.05 Precision Balance

WL-223-0009

More information on the website
mirror.radwag.com/us/info,w1,BL5

The drawings, photos and graphics used are for illustrative purposes only.

Functions

- Labelling
- Plus/Minus Control
- Percent Weighing
- Totalizing
- Parts counting
- Newton unit measurement
- Statistics
- IR sensors
- GLP Procedures
- Animal weighing
- Density determination
- Replaceable unit
- ALIBI Memory

Datasheet

Metrological parameters	
Maximum capacity [Max]	60 kg
Minimum load	-
Preload range	6 kg
Readability [d]	0,5 g
Tare range	-60 kg
Minimum weight (USP)	420 g

Metrological parameters	
Minimum weight (U=1%, k=2)	42 g
Repeatability (Max)	0,4 g
Repeatability (5% Max)	0,21 g
Linearity	±1,5 g
Stabilization time	1 s
Adjustment	internal (automatic)
Physical parameters	
Leveling system	manual
Display	5” graphic colour
Weighing pan dimensions	400×500 mm
Packaging dimensions W x D x H	710×610×240 mm
Net weight	22 kg
Gross weight	24,5 kg
Construction	
Protection class	IP 43
Communication interface	
Communication interface	2×RS232, USB-A, USB-B, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi
Electrical parameters	
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 12V DC 1A max
Environmental conditions	
Operating temperature	+10 – +40 °C

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

Accessories (Additional Fee)

Displays
Antivibration tables
Power Adapters
RS 232 cables (scale - printer)
Cigarette lighter receptacle power supply cables
Professional Weighing Tables
Barcode scanners
RS 232, RS 485 cables
Stands, wall mounting kits and mounting brackets
Receipt Printer
AP2-1 Current Loop Unit

Software (Additional Fee)

• E2R Weighing [WX-010-0099]
• Label Editor R02 [WX-010-0094]
• Scale Editor - EWAG 2.1 [WX-010-0173]
• RAD Key [WX-010-0005]
• Alibi Reader PC Software [WX-010-0114]
• RADWAG Development Studio [WX-010-0104]
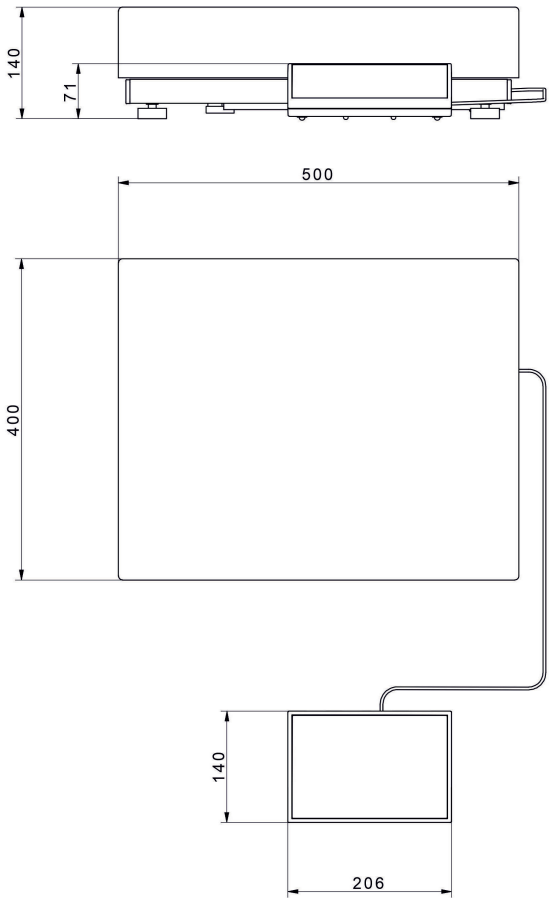
Device dimensions W x D x H