radwag.com

High Resolution Platforms PL.10.HRP

WX-009-1179

More information on the website
mirror.radwag.com/en/info,w1,C3I



The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

Metrological parameters	
Maximum capacity [Max]	10 kg
Minimum load	5 g
Preload range	4 kg
Readability [d]	0.02 g
Tare range	-10 kg
Repeatability	0.03 g
Linearity	±0.06 g
Adjustment	internal (automatic)
Construction	
Protection class	IP 67
Construction	aluminum
Weighing pan material	Stainless steel AISI304
Communication interface	
Communication interface	RS232, RS485, Ethernet

Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz
Environmental conditions	
Operating temperature	+10 – +40 °C
Relative humidity	15% – 80%
Physical parameters	
Weighing pan dimensions	360×280 mm
Packaging dimensions W x D x H	475×560×370 mm
Net weight	18 kg
Gross weight	22 kg




Accessories (Additional Fee)

CY10 Scales for PGC
Ethernet cables (scale - Ethernet)
Antivibration Tables
PUE 7.1 Weighing Terminal
RS 232, RS 485 cables
IN/OUT Cables
Powerbanks
PUE HY10 Weighing Terminal
Ex-Scale-Intended Intrinsically Safe Power Supply for PUE HX5.EX
Weighing Terminal
CY10 Precision Balance
RS 232 – USB Converter


Software (Additional Fee)

• MWMH Manager [WX-010-0103]
• RADWAG Development Studio [WX-010-0104]
• RAD Key [WX-010-0005]

Device dimensions W x D x H

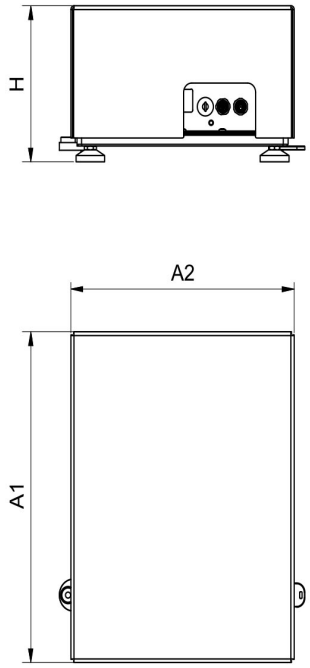

PL.16 - 32.HRP

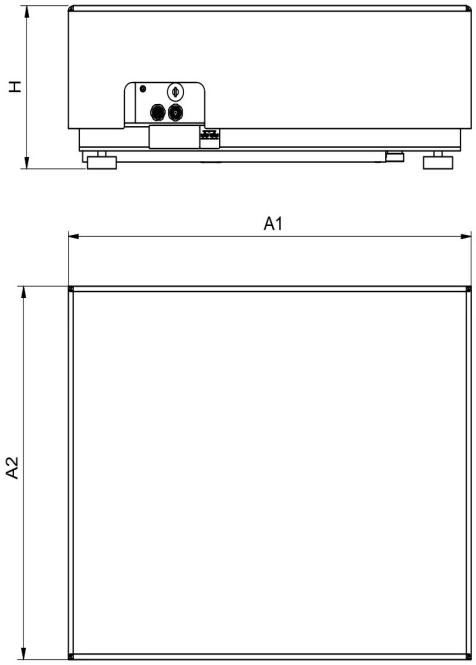

PL.62-2000.HRP

Scale type	A1	A2	H
PL.(16-32).HRP	360	280	180±5
PL.(62-150).HRP	500	400	180±5
PL.150.2.HRP	500	500	180±5
PL.(150.1-300).HRP	800	600	180±5
PL.(300.1-1100).HRP	1000	800	180±5
PL.(2000).HRP	1250	1000	180±5

Dimensions in mm