Plataforma multifuncional WPY 300/C3

WP-111-0122

More information on the website
mirror.radwag.com/br/info,w1,CFG



The drawings, photos and graphics used are for illustrative purposes only.

Funções

- Dosing
- Labelling
- Plus/Minus Control
- Percent Weighing
- Totalizing
- Parts counting
- Peak hold
- Formulation
- Newton unit measurement
- Statistics
- Checkweighing
- IR sensors
- Animal weighing
- Differential weighing
- ALIBI Memory

Ficha Técnica

Parâmetros metrológicos	
Capacidade máxima [máx]	300 kg
Carga mínima	2 kg
Resolução [d]	100 g
Unidade de verificação [e]	100 g
Faixa de tara	-300 kg
Resolução máxima para plataforma não verificada	10 g

Parâmetros metrológicos	
Tempo de estabilização	3 s
Ajuste	externa
Classe OIML	III
Parâmetros físicos	
Display	Tela touchscreen colorida resistiva de 5,7"
Dimensões até prato de pesagem	500×700 mm
Dimensões da embalagem L x P x A	730×800×270 mm
Peso líquido	21,7 kg
Peso bruto	25,5 kg
Construção	
Classe de proteção	IP 65 construção, IP 43 terminal
Interface de comunicação	
Interface de comunicação	2×RS232, 2×USB-A, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi
Parâmetros elétricos	
Fonte de alimentação	100 – 240 V AC 50/60 Hz
Condições ambientais	
Temperatura de operação	-10 – +40 °C

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

Additional fee for verification


Acessórios (Additional Fee)

Cabos de alimentação para acendedor de cigarro automotivo
!Leitores de código de barras
RS 232, RS 485 cabos
Impressoras de etiquetas
Mesas antivibração
Displays
Cabos IN/OUT
Teclado, interruptores externos
Impressora de recibos
Pesos padrão F1 -
pesos botão sem câmara de ajuste, conjuntos
RS 232 – Conversor USB
Cabos RS 232 (plataforma - impressora)

Software (Additional Fee)

• E2R Pesagem [WX-010-0099]
• Leitor Audit Trail [WX-010-0186]
• RADWAG Remote Desktop [WX-010-0107]
• RADWAG Development Studio [WX-010-0104]
• RAD Key [WX-010-0005]
• Editor de etiquetas R02 [WX-010-0094]
• R-Lab [WX-010-0080]

Dimensões do dispositivo L x P x A

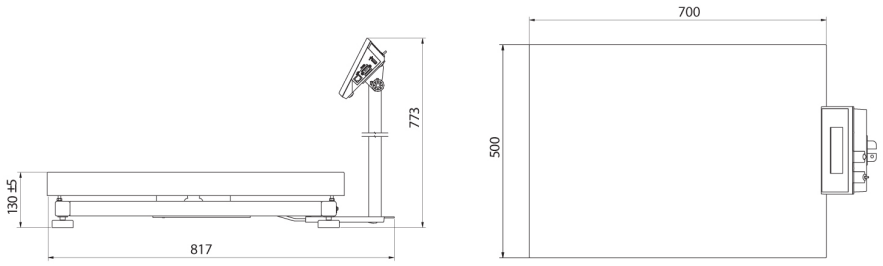

WPY C3/M