



More information on the website  
[mirror.radwag.com/en/info,w1,DF9](http://mirror.radwag.com/en/info,w1,DF9)

# PM01.EX-2 Intrinsically Safe Power Supply Intended for Ex Scale

WX-004-0203



The drawings, photos and graphics used are for illustrative purposes only.

## Datasheet

### Physical parameters

Cable length	10 m
Device dimensions W x D x H	216x174x64 mm

### Construction

Protection class	IP 66 / 68
ATEX Certification	II (2)G [Ex ib Gb] IIC II (2)D [Ex ib Db] IIIC
Housing	Stainless steel
Working in zones	-

### Electrical parameters

Power supply	100 – 240 V AC 50/60 Hz
Power consumption max.	15 W

### Environmental conditions

Operating temperature	-20 – +40 °C
Storage temperature	-20 – +60 °C

## Environmental conditions

Relative humidity

10% – 85% RH no condensation






## Compatible with (Additional Fee)

HX5.EX-1.4P2 H Stainless Steel Beam Scales  
HX5.EX-1 HR Stainless Steel 1-Load-Cell Platform Scales  
HX5.EX-1.4P2 C Beam Scales  
HX5.EX-1.4N Stainless Steel Ramp Scales  
HX5.EX-1.4 C 4-Load-Cell Platform Scales  
HX5.EX-1.4P H Stainless Steel Pallet Scales

HX5.EX-1.4 H/Z Stainless Steel Platform Scales, Pit Version  
HX5.EX-1 C 1-Load-Cell Platform Scales  
HX5.EX-1 H Waterproof Platform Scales  
PUE HX5.EX Weighing Terminal  
HX5.EX-1.4 H Stainless Steel 4-Load-Cell Platform Scales  
HX5.EX-1.4P C Pallet Scales

## Device dimensions W x D x H

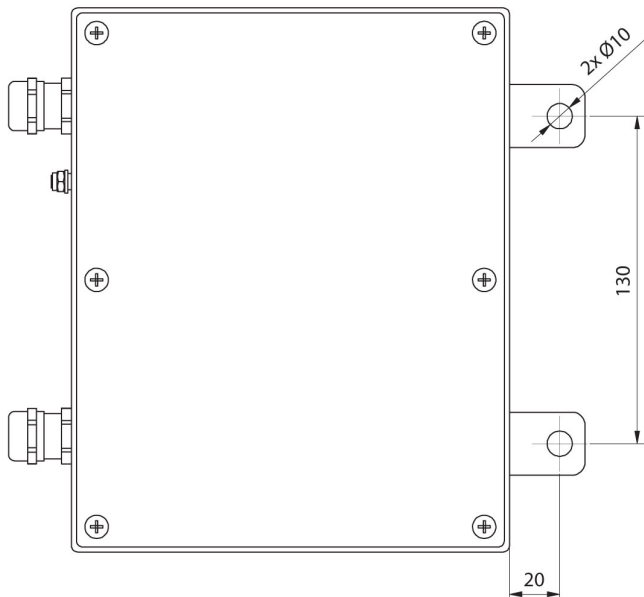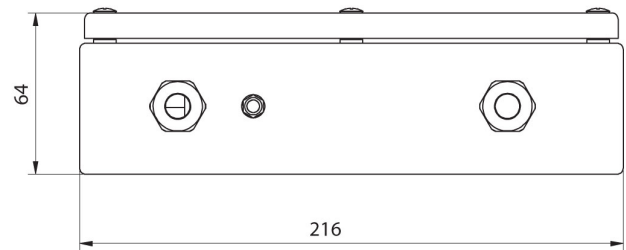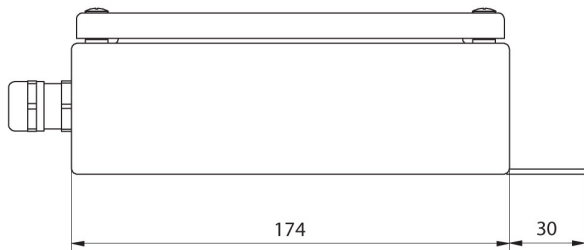

PM01.EX