



More information on the website  
[mirror.radwag.com/en/info,w1,EVL](http://mirror.radwag.com/en/info,w1,EVL)

# High Resolution Platforms PL.10.HRP.H

WX-009-1174



The drawings, photos and graphics used are for illustrative purposes only.

## Datasheet

| Metrological parameters |                         |
|-------------------------|-------------------------|
| Maximum capacity [Max]  | 10 kg                   |
| Minimum load            | 5 g                     |
| Preload range           | 4 kg                    |
| Readability [d]         | 0.02 g                  |
| Tare range              | -10 kg                  |
| Repeatability           | 0.03 g                  |
| Linearity               | ±0.06 g                 |
| Stabilization time      | 2 s                     |
| Adjustment              | internal (automatic)    |
| Construction            |                         |
| Protection class        | IP 66 / 67              |
| Construction            | Stainless steel AISI304 |
| Weighing pan material   | Stainless steel AISI304 |

| Communication interface        |                         |
|--------------------------------|-------------------------|
| Communication interface        | RS232, RS485, Ethernet  |
| Electrical parameters          |                         |
| Power supply                   | 100 – 240 V AC 50/60 Hz |
| Environmental conditions       |                         |
| Operating temperature          | +10 – +40 °C            |
| Relative humidity              | 15% – 80%               |
| Physical parameters            |                         |
| Weighing pan dimensions        | 360×280 mm              |
| Device dimensions W x D x H    | 360×313×170 mm          |
| Packaging dimensions W x D x H | 475×560×370 mm          |
| Net weight                     | 18.7 kg                 |



## Accessories (Additional Fee)

Ethernet cables (scale - Ethernet)  
 Antivibration Tables  
 PUE 7.1 Weighing Terminal  
 RS 232, RS 485 cables  
 IN/OUT Cables


Powerbanks  
 PUE HY10 Weighing Terminal  
 Ex-Scale-Intended Intrinsically Safe Power Supply for PUE HX5.EX  
 Weighing Terminal  
 RS 232 – USB Converter

## Software (Additional Fee)

- MWMH Manager [WX-010-0103]
- RADWAG Development Studio [WX-010-0104]

- RAD Key [WX-010-0005]

## Device dimensions W x D x H

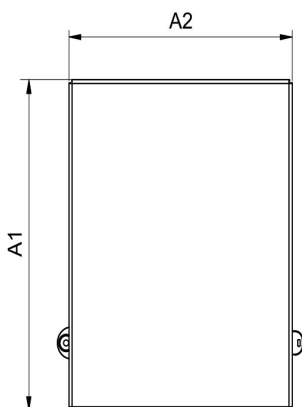

PL.16 - 32.HRP.H

PL.62-2000.HRP.H

| Scale type            | A1   | A2   | H     |
|-----------------------|------|------|-------|
| PL.(16-32).HRP.H      | 360  | 280  | 180±5 |
| PL.(62-150).HRP.H     | 500  | 400  | 180±5 |
| PL.150.2.HRP.H        | 500  | 500  | 180±5 |
| PL.(150.1-300).HRP.H  | 800  | 600  | 180±5 |
| PL.(300.1-1100).HRP.H | 1000 | 800  | 180±5 |
| PL.(2000).HRP.H       | 1250 | 1000 | 180±5 |

Dimensions in mm