



# HRP 150.1.5Y.KO Mass Comparator

WL-414-0023

More information on the website  
[mirror.radwag.com/us/info,w1,EVM](http://mirror.radwag.com/us/info,w1,EVM)



The drawings, photos and graphics used are for illustrative purposes only.

## Datasheet

|                                 |                      |
|---------------------------------|----------------------|
| F1 Calibration Range            | 100 kg               |
| F2 Calibration Range            | 50 – 100 kg          |
| M1 Calibration Range            | 20 – 100 kg          |
| M2 Calibration Range            | 10 – 100 kg          |
| Maximum capacity [Max]          | 151 kg               |
| Readability [d]                 | 0,05 g               |
| Standard repeatability [5% Max] | 0,1 g                |
| Standard repeatability [Max]    | 0,15 g               |
| Permissible repeatability       | 0,25 g               |
| Linearity                       | ±2 g                 |
| Eccentricity (tested load)      | 2d / 1 mm            |
| Electric compensation range     | 0 – 151 kg           |
| Stabilization time              | 10 s                 |
| Adjustment                      | internal (automatic) |

| Physical parameters   |   |
|---|---|
| Display   | 10" graphic colour touchscreen                                |
| Weighing pan dimensions   | 800×600 mm  |
| Self-centering weighing pan dimensions                              | 600×600 mm  |
| Weighing unit dimensions with self-centering weighing pan           | 810×600×260 mm  |
| Controlling device dimensions                                       | 249×170×72 mm   |
| Comparator packaging dimensions without self-centering weighing pan | 988×800×310 mm  |
| Comparator packaging dimensions with self-centering weighing pan    | 988×800×355 mm  |
| Net weight  | 143,5 kg  |
| Gross weight  | 166,5 kg  |
| Recommended load speed  | 0,3 m/min   |
| Maximum permissible load speed                                      | 0,6 m/min   |
| Weighing unit dimensions without self-centering weighing pan        | 810×600×165 mm  |
|   |   |
| Communication interface   | 2×USB-A, USB-C, RS 232 (COM3), HDMI, Ethernet, Wi-Fi, Hotspot |
|   |   |
| Operating temperature   | +15 – +30 °C  |
| Operating temperature change rate                                   | ±1 °C / 12 h  |
| Relative humidity   | 40% – 60%   |
| Relative humidity change rate                                       | ±5% / 4 h   |

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



## Accessories (Additional Fee)

RFID Tags  
 Additional modules  
 Protective cover for balances  
 Barcode scanners  
 THBR 2.0 System - Ambient Conditions Monitoring


RS 232, RS 485 cables  
 Receipt Printer  
 Stands, wall mounting kits and mounting brackets  
 Fingerprint Reader

## Software (Additional Fee)

- RAD Key [WX-010-0005]
- RMCS System Network Management of Calibration Process [WX-010-0048]

- RMCS Lite [WX-010-0164]

## Device dimensions W x D x H

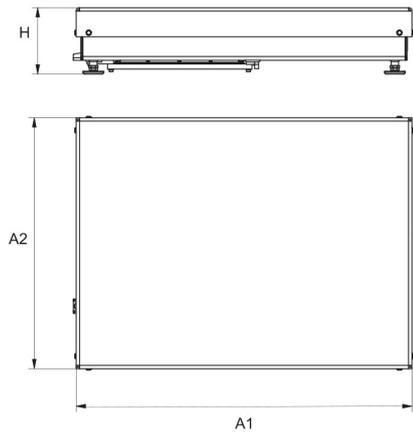

| Type           | A1   | A2   | H   |
|----------------|------|------|-----|
| HRP 200.5Y.KO  | 809  | 600  | 162 |
| HRP 500.5Y.KO  | 809  | 600  | 162 |
| HRP 1000.5Y.KO | 1011 | 800  | 182 |
| HRP 1500.5Y.KO | 1250 | 1000 | 235 |
| HRP 2000.5Y.KO | 1250 | 1000 | 235 |

Dimensions in mm