radwag.com

WLC 10.X7 上皿天秤

WL-227-0010

More information on the website
mirror.radwag.com/ja/info,w1,FOO

The drawings, photos and graphics used are for illustrative purposes only.

機能

- Autotest
- Dosing
- Plus/Minus Control
- Percent Weighing
- Parts counting
- Peak hold
- Formulation
- Newton unit measurement
- Statistics
- Checkweighing
- IR sensors
- Under-pan weighing
- GLP Procedures
- Animal weighing
- Density determination
- Ambient conditions monitoring
- Replaceable unit
- Statistical Quality Control
- ALIBI Memory
- Mass for titrator
- Wi-Fi

データシート

計測パラメータ	
最大ひょう量 [Max]	10 kg
最小表示 [d]	0,1 g

計測パラメータ	
法定計量時の単位 [e]	-
風袋範囲	-10 kg
繰返し性	0,08 g
直線性	±0,3 g
安定化時間	2 s
調整	外部
物理的パラメータ	
レベリングシステム	手動
ディスプレイ	7" グラフィック カラー タッチスクリーン
計量皿寸法	195×195 mm
梱包寸法 幅x奥行x高さ	430×270×190 mm
正味重量	2,2 kg
総重量	3,8 kg
工事中	
保護クラス	IP 43
コンポーネントとソフトウェア	
データベース容量	製品、ユーザー、包装、顧客、配合、配合レポート、周囲条件、計量、アリバイ・メモリー
通信インターフェース	
通信インターフェース	2×RS232[1], USB-A, USB-B, Ethernet, Wi-Fi
電気的パラメータ	
電源	アダプター: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A バランス: 10 – 15VDC 0,6A max
環境条件	
動作温度	+10 – +40 °C

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

アクセサリ (Additional Fee)

天秤保管ケース
防振台
電源アダプタ
RS 232 ケーブル (はかり - プリンタ)
シガーライターソケット電源ケーブル
USB cable (はかり - プリンタ)
バーコードスキャナ
底部吊り下げ計量
RS 232、RS 485 ケーブル
粒状体密度測定キット
ディスプレイ
レシートプリンタ
天秤用保護カバー
RS 232 – RS 485 コンバータ

ソフトウェア (Additional Fee)

- RAD Key [WX-010-0005]
- R-Lab [WX-010-0080]
- RADWAG Development Studio [WX-010-0104]
- Alibi Reader [WX-010-0114]
- Scale Editor 2.1 [WX-010-0173]
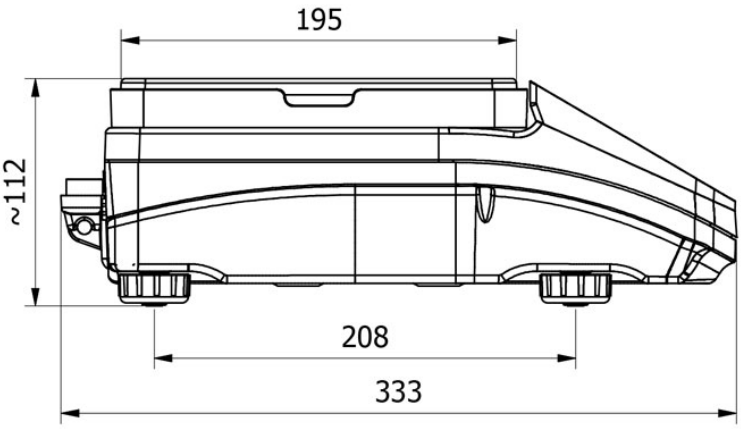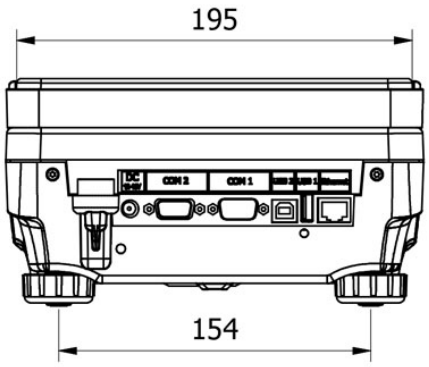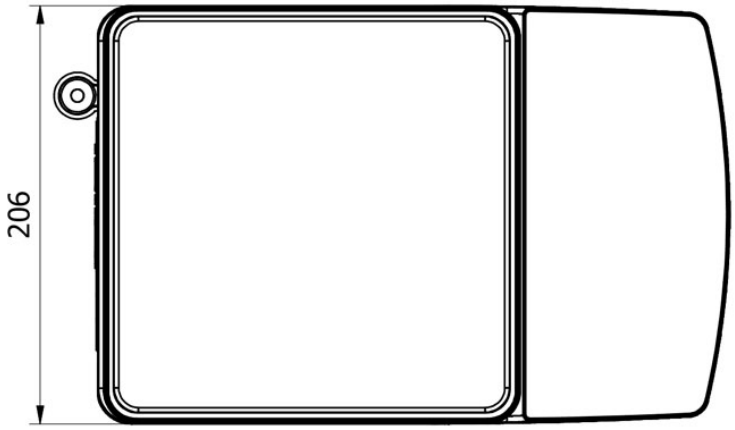
デバイスの寸法 幅x奥行x高さ