radwag.com

PUE 7.1P (panel) Weighing Terminal

WX-008-0026

More information on the website
mirror.radwag.com/en/info,w1,GDY

The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

Physical parameters	
Display	5.7” resistive colour touchscreen
Device dimensions W x D x H	215×156×120 mm
Packaging dimensions W x D x H	300×250×130 mm
Net weight	0.8 kg
Gross weight	2.75 kg
Construction	
Protection class	front IP 66/67, construction IP 32
Keypad	touch screen
Housing	Stainless steel
Communication interface	
Communication interface	2×RS232, 2×USB-A, Ethernet, 4 IN / 4 OUT (digital)
Additional DP6 A/C converter module	1 (option)
Metrological parameters	
Minimum load cell impedance	50 Ω

Metrological parameters	
Maximum load cell impedance	1200 Ω
Load cell excitation voltage	5V DC
Maximum increase of signal	19.5 mV
Environmental conditions	
Operating temperature	-10 – +40 °C
Relative humidity	10% – 85% RH no condensation
Number of buttons	8
Components and software	
Operating system	Linux
Processor	quad-core 64-bit Cortex-A53 1.2 GHz
Memory	RAM 1GB LPDDR2
Data memory	16 GB (micro SD)
Features of use	
Max number of platforms	2

CE

Compatible with (Additional Fee)

Displays
Transponder card readers
Power Adapters
RS 232 cables (scale - printer)
Barcode scanners
RS 232, RS 485 cables
Label Printers
IN/OUT Cables
Keypad, external switches
Additional Weighing platforms Module
RS 232 – USB Converter
Receipt Printer

Software (Additional Fee)

• E2R Weighing [WX-010-0099]
• Audit Trail Reader [WX-010-0186]
• RADWAG Remote Desktop [WX-010-0107]
• Scale Editor 2.1 [WX-010-0173]
• RAD Key [WX-010-0005]
• Label Editor R02 [WX-010-0094]
• R-Lab [WX-010-0080]
• RADWAG Development Studio [WX-010-0104]

Device dimensions W x D x H

PUE 7.1

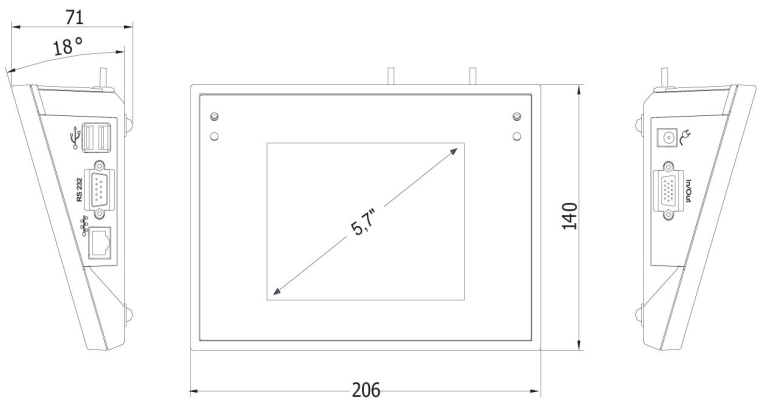
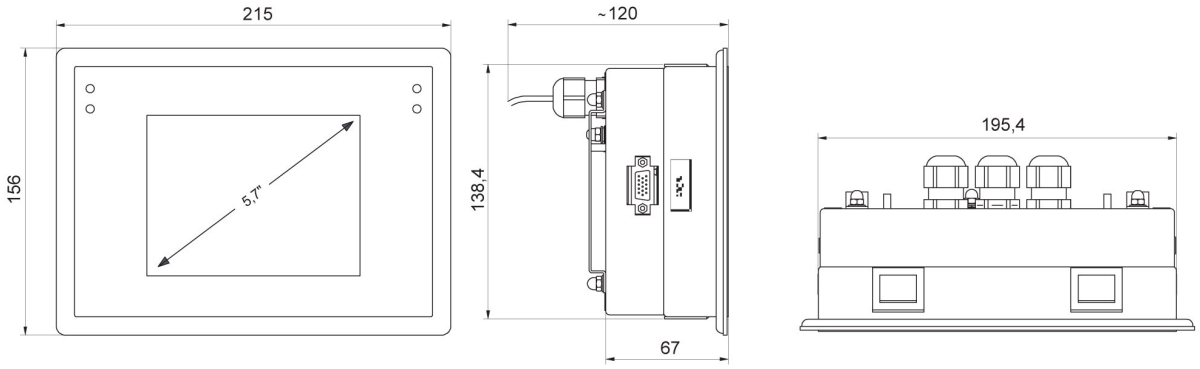
PUE 7.1P