



More information on the website
mirror.radwag.com/en/info,w1,l5T

H315.4P2.1500.H Stainless Steel Beam Scale

WP-236-0002



The drawings, photos and graphics used are for illustrative purposes only.

Functions

 Plus/Minus Control

 Percent Weighing

 Totalizing

 Parts counting

 Internal battery

 Peak hold

 Newton unit measurement

 Animal weighing

Datasheet

| Metrological parameters | |
|--|----------|
| Maximum capacity [Max] | 1500 kg |
| Minimum load | 10 kg |
| Readability [d] | 500 g |
| Verification unit [e] | 500 g |
| Tare range | -1500 kg |
| Max readability for non-verified scale | 500 g |
| OIML Class | III |

| Physical parameters | |
|--------------------------------|---|
| Display | 4.3" LCD (backlit) |
| Cable length | 3 m + 5 m |
| Weighing pan dimensions | 2 pcs 1.2 m |
| Device dimensions W x D x H | 1200×120×85 mm |
| Packaging dimensions W x D x H | 1400×400×550 mm |
| Scale mass with indicator | 40 kg |
| Construction | |
| Protection class | IP 66 / 69 construction, IP 66 / 67 / 69 terminal |
| Communication interface | |
| Communication interface | RS232, USB |
| Optional interfaces | RS232 or RS485 or 4IN/4OUT or Ethernet or analog output 4-20 mA |
| Electrical parameters | |
| Power supply | 100 – 240 V AC 50/60 Hz |
| Optional power supply | internal rechargeable battery |
| Operation time on batteries | max 7h |
| Environmental conditions | |
| Operating temperature | -10 – +40 °C |
| Relative humidity | 10% – 85% RH no condensation |



Additional fee for verification



Accessories (Additional Fee)

AP2-4 Current Loop Unit
 RS 232 cables (scale - printer)
 Displays
 Ethernet cables (scale - Ethernet)
 RS 232, RS 485 cables
 Power Adapters


RS 232 – Ethernet Converter
 USB adapter
 Receipt Printer
 USB cable (scale - printer)
 Stands, wall mounting kits and mounting brackets
 RS 232 – USB Converter

Software (Additional Fee)

- RAD Key [WX-010-0005]
- Scale Editor 2.1 [WX-010-0173]

- R-Lab [WX-010-0080]

Device dimensions W x D x H

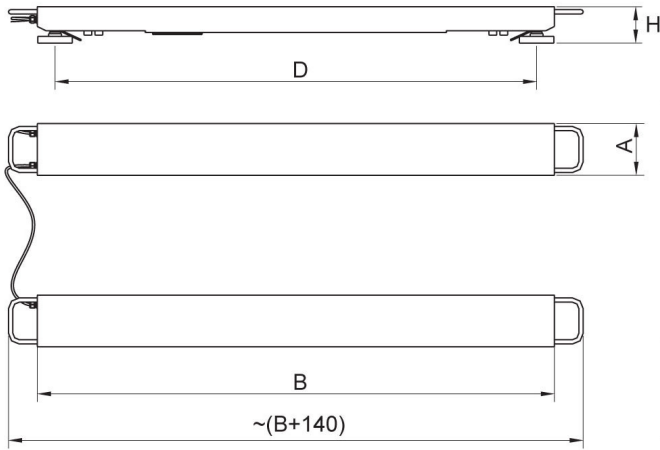

| Scale type | A | B | H | D |
|------------------|-----|------|-----|------|
| H315.4P2.600.H | 120 | 1200 | 85 | 1100 |
| H315.4P2.1500.H | 120 | 1200 | 85 | 1100 |
| H315.4P2.3000.H | 120 | 1200 | 85 | 1100 |
| H315.4P2.2000.H1 | 120 | 2000 | 105 | 1900 |
| H315.4P2.2000.H2 | 120 | 2500 | 105 | 2400 |
| H315.4P2.4000.H1 | 120 | 2000 | 155 | 1880 |
| H315.4P2.4000.H2 | 120 | 2500 | 155 | 2380 |
| H315.4P2.6000.H1 | 120 | 2000 | 155 | 1880 |
| H315.4P2.6000.H2 | 120 | 2500 | 155 | 2380 |

dimensions in mm