radwag.com

# H315.150/300.H5.K Waterproof Scale

WP-124-1044

More information on the website
mirror.radwag.com/en/info,w1,IFB



The drawings, photos and graphics used are for illustrative purposes only.

## Functions

- Plus/Minus Control
- Percent Weighing
- Totalizing
- Parts counting
- Internal battery
- Peak hold
- Newton unit measurement
- Animal weighing

## Datasheet

| | |
|---|---|
| **Metrological parameters** | |
| Maximum capacity [Max] | 150 / 300 kg |
| Minimum load | 1 kg |
| Readability [d] | 50 / 100 g |
| Verification unit [e] | 50 / 100 g |
| Tare range | -300 kg |
| OIML Class | III |
| **Physical parameters** | |
| Display | 4.3” LCD (backlit) |
| Cable length | 2.5 m |

| | |
|---|---|
| **Physical parameters** | |
| Weighing pan dimensions | 600×600 mm |
| Packaging dimensions W x D x H | 710×710×330 mm |
| Net weight | 21.4 kg |
| Gross weight | 25.4 kg |
| **Construction** | |
| Protection class | IP 66 / 67 construction, IP 66 / 67 / 69 terminal |
| **Communication interface** | |
| Communication interface | RS232, USB |
| Optional interfaces | RS232 or RS485 or 4IN/4OUT or Ethernet or analog output 4-20 mA |
| **Electrical parameters** | |
| Power supply | 100 – 240 V AC 50/60 Hz |
| Optional power supply | internal rechargeable battery |
| Operation time on batteries | max 7h |
| **Environmental conditions** | |
| Operating temperature | -10 – +40 °C |
| Relative humidity | 10% – 85% RH no condensation |





Additional fee for verification

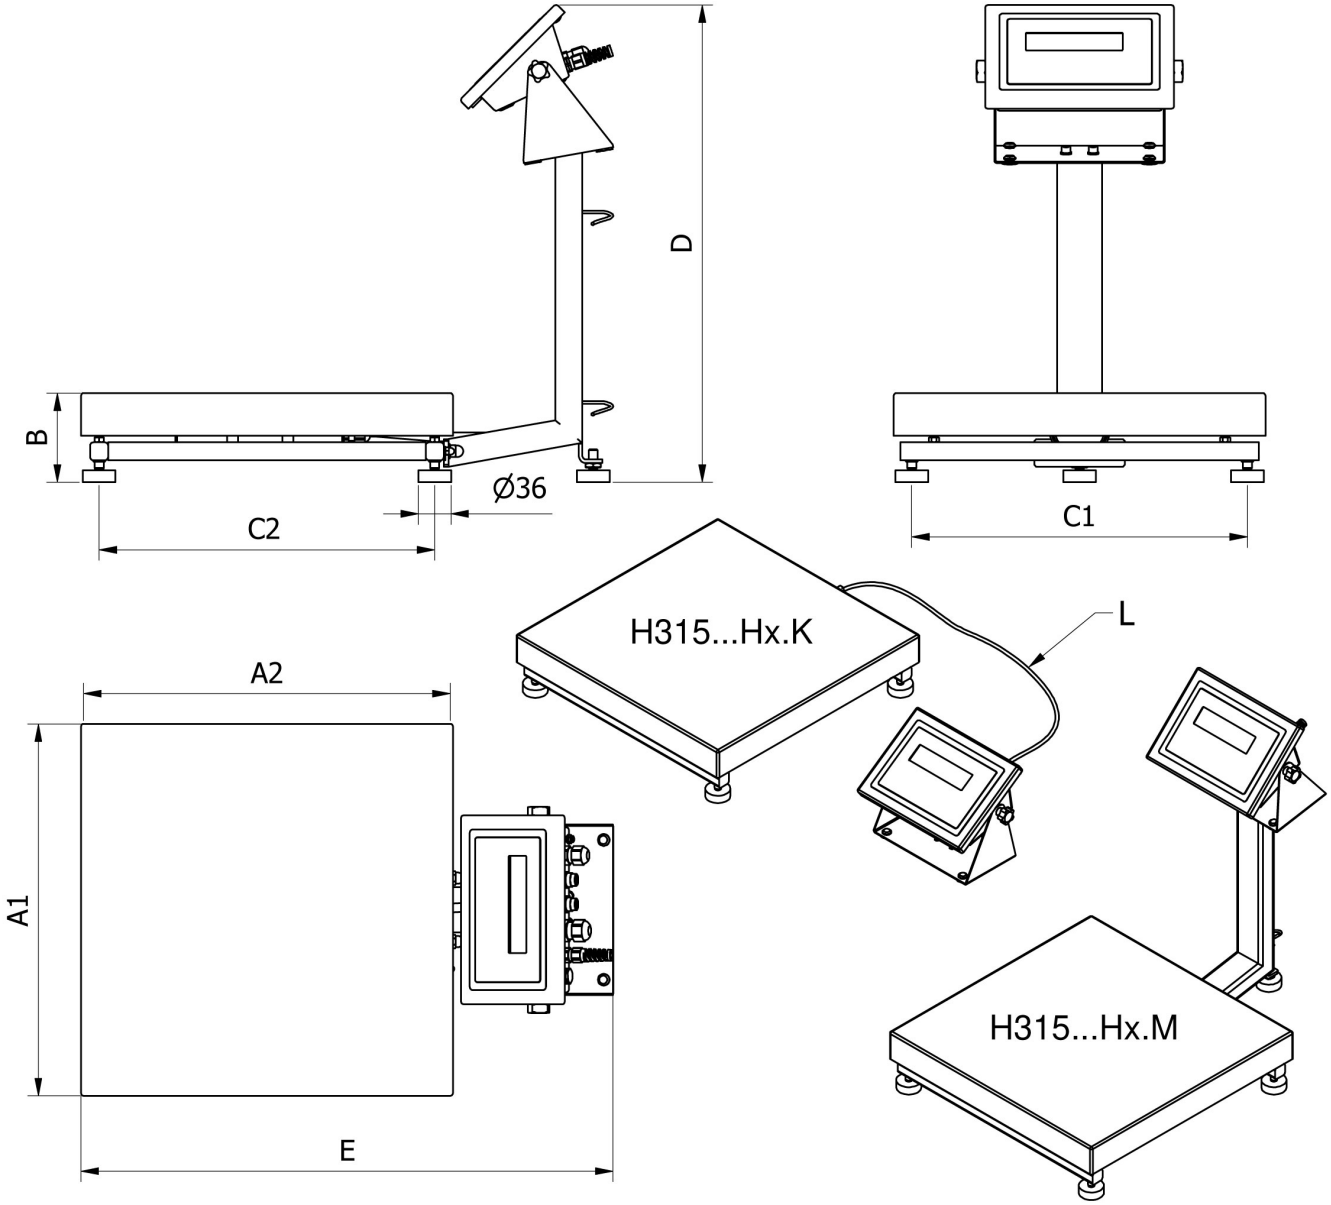

## Accessories (Additional Fee)

AP2-4 Current Loop Unit
RS 232 cables (scale - printer)
Antivibration Tables
Roller Table
Displays
Ethernet cables (scale - Ethernet)
RS 232, RS 485 cables
Power Adapters
RS 232 – Ethernet Converter
USB adatper
Receipt Printer
USB cable (scale - printer)
Stands, wall mounting kits and mounting brackets
RS 232 – USB Converter

## Software (Additional Fee)

• RAD Key [WX-010-0005]
• Scale Editor 2.1 [WX-010-0173]
• R-Lab [WX-010-0080]

# Device dimensions W x D x H




| | | A1 | A2 | B | C1 | C2 | D | E | L |
|---|---|---|---|---|---|---|---|---|---|
| H135...H1.M | 150 x 200 | 152 | 202 | 87 ± 3 | 110 | 190 | ~443 | ~361 | |
| H135...H1.K | 150 x 200 | 152 | 202 | 87 ± 3 | 110 | 146 | - | - | 1,5m |
| H315...H2.M | 250 x 300 | 246 | 306 | 104 ± 3 | 208 | 268 | ~525 | ~483 | |
| H315...H2.K | 250 x 300 | 246 | 306 | 104 ± 3 | 208 | 268 | - | - | 1,5m |
| H315...H3.M | 410 x 410 | 410 | 410 | 98 ± 2 | 370 | 370 | ~525 | ~587 | |
| H315...H3.K | 410 x 410 | 410 | 410 | 98 ± 2 | 370 | 370 | - | - | 2,5m |
| H315...H4.M | 500 x 500 | 497 | 497 | 155 ± 5 | 400 | 400 | ~767 | ~650 | |
| H315...H4.K | 500 x 500 | 497 | 497 | 155 ± 5 | 400 | 400 | - | - | 2,5m |
| H315...H3/5.M | 400 x 600 | 597 | 397 | 155 ± 5 | 500 | 300 | ~767 | ~550 | |
| H315...H3/5.K | 400 x 600 | 597 | 397 | 155 ± 5 | 500 | 300 | - | - | 2,5m |
| H315...H5.M | 600 x 600 | 597 | 597 | 155 ± 5 | 500 | 500 | ~767 | ~750 | |
| H315...H5.K | 600 x 600 | 597 | 597 | 155 ± 5 | 500 | 500 | - | - | 2,5m |
| H315...H6.M | 800 x 800 | 799 | 799 | 135 ± 5 | 720 | 740 | ~773 | ~976 | |
| H315...H6.K | 800 x 800 | 799 | 799 | 135 ± 5 | 720 | 740 | - | - | 2,5m |