C32.15.C3.M Multifunctional Scale

WP-120-0040

The drawings, photos and graphics used are for illustrative purposes only.

Functions

Labelling	Plus/Minus Control	Percent Weighing	Totalizing
Parts counting	Newton unit measurement	Statistics	IR sensors
GLP Procedures	Replaceable unit	ALIBI Memory	

Datasheet

Maximum capacity [Max]	15 kg
Minimum load	100 g
Readability [d]	5 g
Verification unit [e]	5 g
Tare range	-15 kg
Max readability for non-verified scale	1 g
OIML Class	III

Physical parameters	
Display	5" graphic colour
Weighing pan dimensions	700×500 mm
Packaging dimensions W x D x H	730×800×270 mm
Net weight	23,4 kg
Gross weight	27,2 kg

Construction	
Protection class	IP 65 construction, IP 43 terminal
Construction	mild steel St3S
Weighing pan material	Stainless steel AISI304

Communication interface	2×RS232, USB-A, USB-B, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi

Power supply	100 – 240 V AC 50/60 Hz
Power consumption max.	10 W
Optional power supply	internal rechargeable battery
Operation time on batteries	operation time up to 5 h

Operating temperature	-10 – +40 °C

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

Additional fee for verification

Accessories (Additional Fee)

Displays
Power Adapters
RS 232 cables (scale - printer)
Cigarette lighter receptacle power supply cables
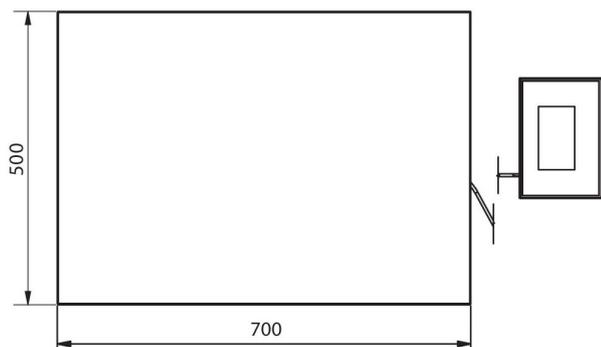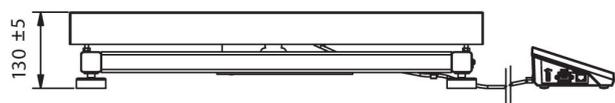Barcode scanners
RS 232, RS 485 cables

Label Printers
!Keypad, external switches
Stands, wall mounting kits and mounting brackets
Additional modules
Receipt Printer
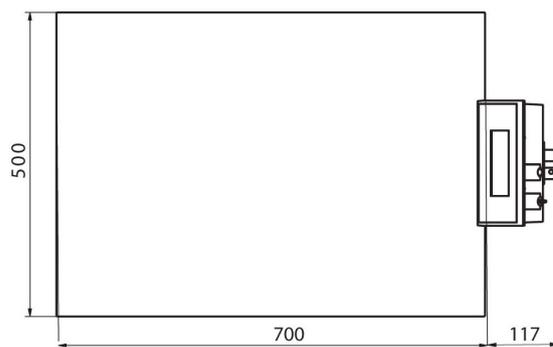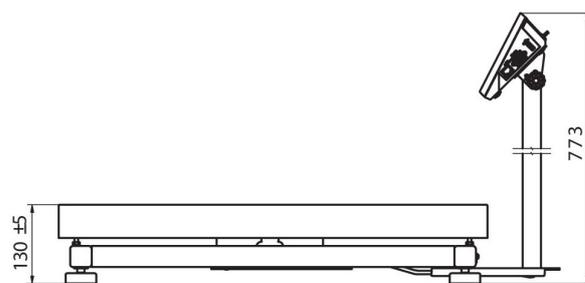AP2-1 Current Loop Unit

Software (Additional Fee)

• E2R Weighing [WX-010-0099]
• Label Editor R02 [WX-010-0094]
• Scale Editor - EWAG 2.1 [WX-010-0173]

• RAD Key [WX-010-0005]
• Alibi Reader PC Software [WX-010-0114]
• RADWAG Development Studio [WX-010-0104]

Device dimensions W x D x H

130 ±5

500

700

C32.C3.K

773

130 ±5

500

700   117

C32.C3.M