WPY 60/C3/K Multifunctional Scale

WP-111-0132

The drawings, photos and graphics used are for illustrative purposes only.

Functions

Dosing	Labelling	Plus/Minus Control	Percent Weighing
Totalizing	Parts counting	Peak hold	Formulation
Newton unit measurement	Statistics	Checkweighing	IR sensors
Animal weighing	Differential weighing	ALIBI Memory	

Datasheet

Metrological parameters	
Maximum capacity [Max]	60 kg
Minimum load	400 g
Readability [d]	20 g
Verification unit [e]	20 g
Tare range	-60 kg
Max readability for non-verified scale	2 g

Metrological parameters	
Stabilization time	3 s
Adjustment	external
OIML Class	III

Physical parameters	
Display	5.7" resistive colour touchscreen
Weighing pan dimensions	500×700 mm
Packaging dimensions W x D x H	730×800×270 mm
Net weight	21.7 kg
Gross weight	26 kg

Construction	
Protection class	IP 65 construction, IP 43 terminal

Communication interface	
Communication interface	2×RS232, 2×USB-A, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi

Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz

Environmental conditions	
Operating temperature	-10 – +40 °C

Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile.

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

 Additional fee for verification

Accessories (Additional Fee)

Transponder card readers
RS 232 cables (scale - printer)
Cigarette lighter receptacle power supply cables
Barcode scanners
RS 232, RS 485 cables
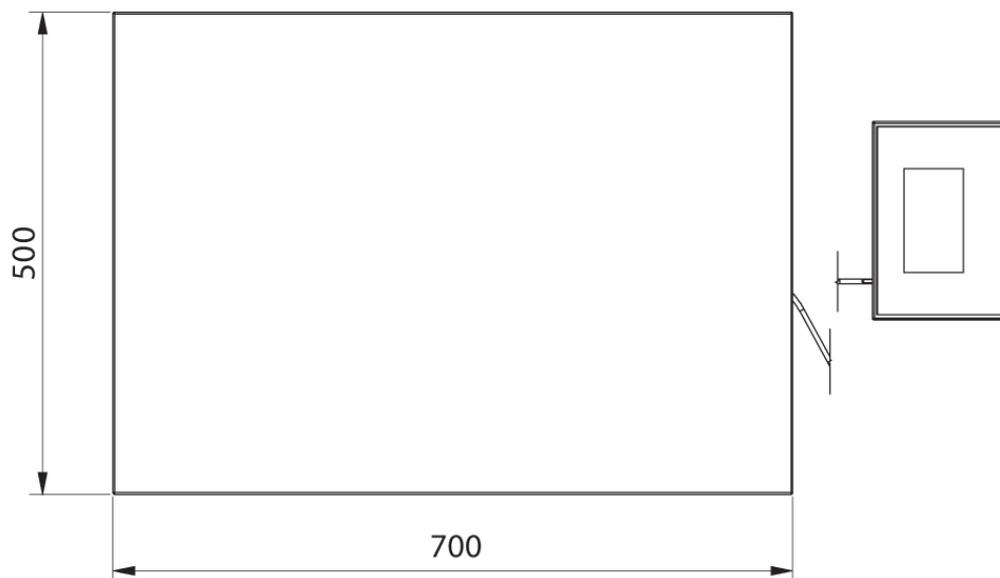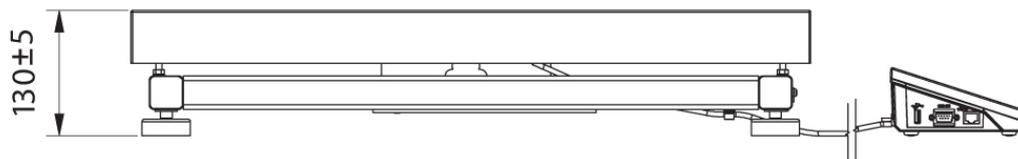Label Printers
Displays
IN/OUT Cables

Keypad, external switches
Stands, wall mounting kits and mounting brackets
Receipt Printer
F1 Mass Standard -
knob weights without adjustment chamber, set
AP2-1 Current Loop Unit
Additional Weighing platforms Module
RS 232 – USB Converter

Software (Additional Fee)

• E2R Weighing [WX-010-0099]
• Audit Trail Reader [WX-010-0186]
• RADWAG Remote Desktop [WX-010-0107]
• Scale Editor 2.1 [WX-010-0173]

• RAD Key [WX-010-0005]
• Label Editor R02 [WX-010-0094]
• R-Lab [WX-010-0080]
• RADWAG Development Studio [WX-010-0104]

Device dimensions W x D x H

130±5

500

700

WPY C3/K