



More information on the website  
[mirror.radwag.com/it/info,w1,L5U](http://mirror.radwag.com/it/info,w1,L5U)

# PM02.EX-1-2 intrinsically safe power supply intended for EX scale

WX-004-0257



The drawings, photos and graphics used are for illustrative purposes only.

## Specifiche

| Parametri fisici               |   |
|--------------------------------|---|
| Lunghezza del cavo             | 3 m   |
| Device dimensions L x P x A    | 216x174x64 mm   |
| Costruzione                    |   |
| Punteggio IP                   | IP 66 / 68  |
| Certificazione ATEX            | II 2G Ex eb mb [ib] IIC T4 Gb<br>II 2D Ex tb [ib] IIIC T70°C Db |
| Struttura                      | Stainless steel   |
| Lavorare in zone               | 1, 2 (gases); 21, 22 (dusts)                                    |
| Parametri elettrici            |   |
| Alimentatore                   | 100 – 240 V AC 50/60 Hz   |
| Massimo assorbimento elettrico | 15 W  |
| Environmental conditions       |   |
| Ambiente di lavoro             | -20 – +40 °C  |
| Temperatura di stoccaggio      | -20 – +60 °C  |

## Environmental conditions

Umidità relativa

10% – 85% RH no condensation






## Compatibile con (Additional Fee)

Piattaforme in acciaio inox HRP EX.H  
Piattaforme HRP verniciata a polvere

Piattaforme in acciaio inox HRP.H  
Piattaforme HRP EX verniciata a polvere

## Device dimensions L x P x A

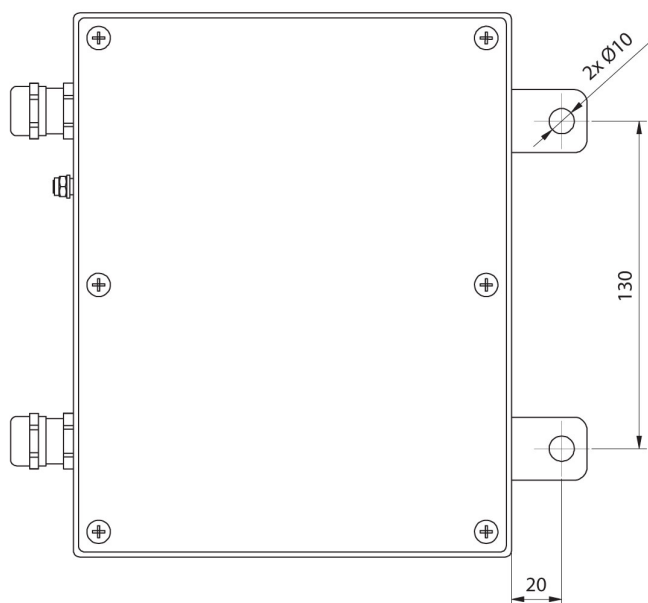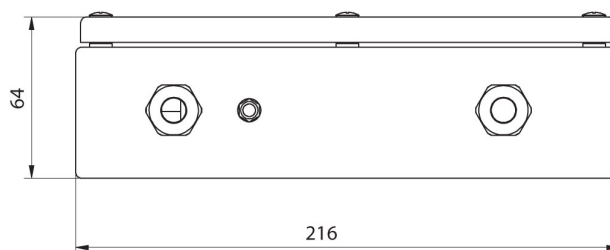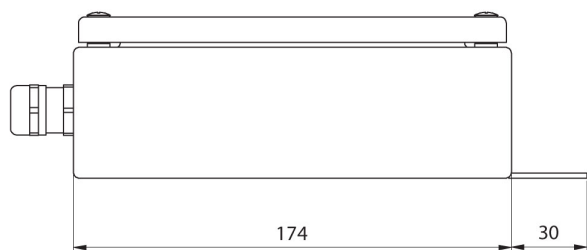

PM01.EX