



More information on the website
mirror.radwag.com/us/info,w1,LQX

MW-04-3 Mass Converter



The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

Construction	
Protection class	IP 65
Housing	aluminum
Communication interface	
Communication interface	RS232, PROFIBUS
Power supply	
Power supply	100 – 240 V AC 50/60 Hz
Power consumption max.	25 W
Maximum quantity of divisions from converter	838 860 ×10
Minimum volatge per verification unit	0,4 μV
Minimum load cell impedance	80 Ω
Maximum load cell impedance	1200 Ω
Load cell excitation voltage	5V DC
Maximum increase of signal	19,5 mV
Connection of load cells	4 or 6 wires + shield

Operating temperature	-10 – +40 °C
Physical parameters	
Packaging dimensions	300×250×130 mm
Net weight	2,5 kg
Gross weight	3 kg
Multiple range	YES
Features of use	
Max number of platforms	2 (max 4)

Compatible with

Additional Weighing platforms Module


RS 232 – USB Converter

Software

- RAD Key [WX-010-0005]
- RADWAG Development Studio [WX-010-0104]

- MW Manager [WX-010-0113]

Device dimensions

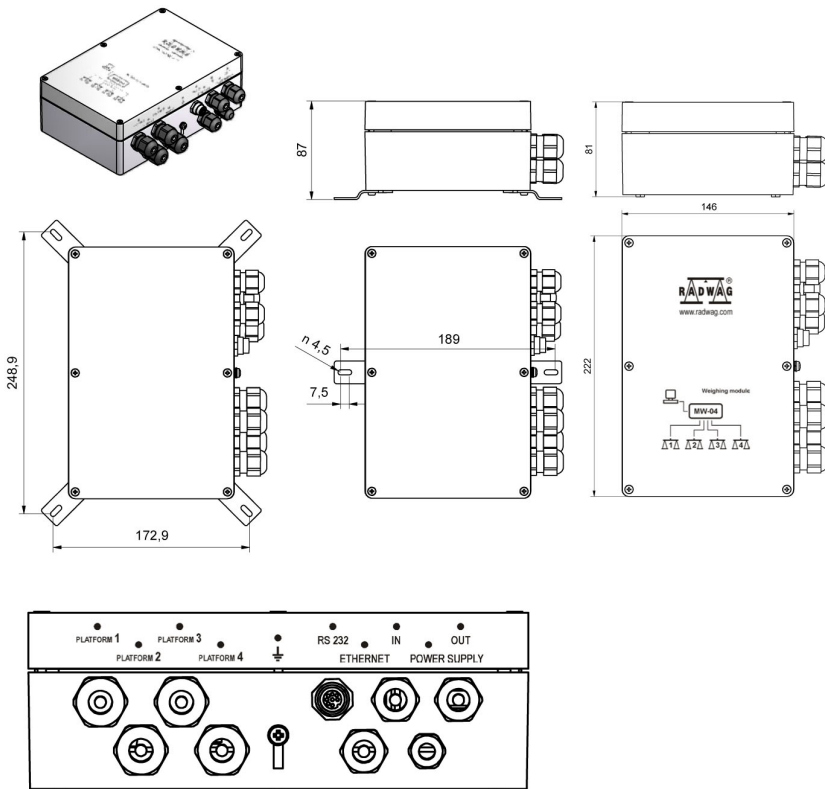

MW-04