radwag.com

# HX5.EX-1.15.HR5 Tek Yük Hücreli Platform Terazi

WW-007-0018

More information on the website
mirror.radwag.com/tr/info,w1,NJL



The drawings, photos and graphics used are for illustrative purposes only.

## Fonksiyonlar

- Labelling
- Plus/Minus Control
- Percent Weighing
- Parts counting
- Newton unit measurement
- Statistics
- GLP Procedures
- Replaceable unit
- ALIBI Memory

## Teknik Veriler

| Metrolojik parametreler | |
|---|---|
| Maksimum yük [Max] | 15 kg |
| Minimum yük [Min] | 100 g |
| Okuma içinğruluğu [d] | 5 g |
| Yasallaştırma birimi [e] | 5 g |
| Dara aralığı | -15 kg |
| OIML sınıfı | III |

| | |
|---|---|
| **Fiziksel parametreler** | |
| Display | 5” grafik renkli |
| Kablo uzunluğu | 2,5 m |
| Tartım kefesi boyutları | 600×600 mm |
| Ambalaj boyutları G x D x Y | 710×710×550 mm |
| Net ağırlık | 25,2 kg |
| Brüt ağırlık | 29,9 kg |
| **Konstrüksiyon** | |
| IP Sınıfı | IP 66 / 67 / 69 konstrüksiyon, IP 66 / 68 terminal |
| Sertifikasyon ATEX | II 2G Ex ib IIC T4 Gb<br>II 2D Ex ib IIIC T135°C Db |
| Sertifikasyon IECEx | Ex ib IIC T4 Gb<br>Ex ib IIIC T135°C Db |
| Konstrüksiyon | Paslanmaz çelik AISI316 |
| Tartım kefesi | Paslanmaz çelik AISI316 |
| **Haberleşme arayüzler** | |
| Haberleşme arayüzü | 2×RS232, RS485 |
| **Elektrik parametreleri** | |
| Güç kaynağı | 100 – 240 V AC 50/60 Hz |
| Maksimum güç tüketimi | 15 W |
| **Çevresel koşullar** | |
| Çalıştırma sıcaklığı | -10 – +40 °C |
| Atmosferik nem | 10% – 85% RH yoğunlaşma yok |
| İndikatör | PUE HX5.EX-1 |

Additional fee for verification

## Aksesuarlar (Additional Fee)

Haberleşme modülü
Terazi için tasarlanmış kendinden korumalı güç kaynağı
Fiş yazıcı

## Yazılım (Additional Fee)


- E2R Tartım [WX-010-0099]
- Etiket Editörü R02 [WX-010-0094]
- R-Lab [WX-010-0080]
- RADWAG Development Studio [WX-010-0104]
- RAD Key [WX-010-0005]
- Alibi Okuyucu PC Yazılımı [WX-010-0114]
- Terazi Editörü - EWAG 2.1 [WX-010-0173]

# Cihaz boyutları G x D x Y


| Scale type | A1 | A2 | B |
|---|---|---|---|
| HX5.EX-1.HR2 | 250 | 300 | 103±3 |
| HX5.EX-1.HR3 | 410 | 410 | 98±2 |
| HX5.EX-1.HR4 | 500 | 500 | 155±5 |
| HX5.EX-1.HR3/5 | 400 | 600 | 155±5 |
| HX5.EX-1.HR5 | 600 | 600 | 155±5 |

Dimensions in mm

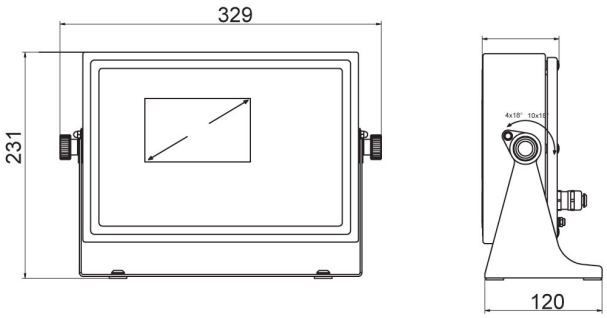


PUE HX5.EX-1

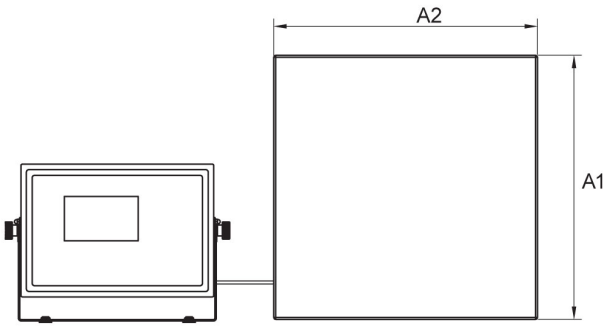


Platform H