




More information on the website
mirror.radwag.com/en/info,w1,ODB

MPS.M.3300.R1 Weighing Module

WX-016-0343

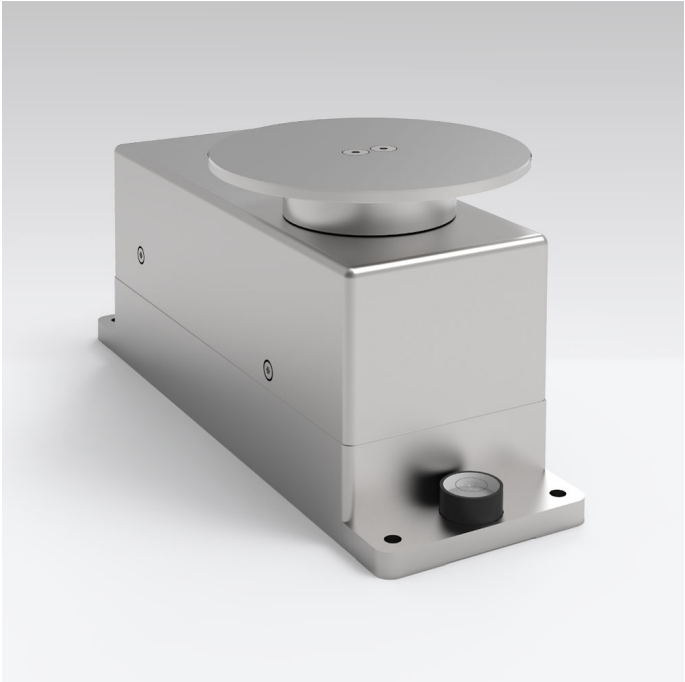

The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

| Metrological parameters | |
|--|----------|
| Maximum capacity [Max] | 3300 g |
| Preload range | 330 g |
| Readability [d] | 10 mg |
| Repeatability | 7 mg |
| Linearity | ±20 mg |
| Warm-up time after connection to power | 1 h |
| Stabilization time | 2 s |
| Adjustment | external |
| Construction | |
| Protection class | IP 43 |
| Housing | aluminum |
| Weighing pan material | aluminum |
| Communication interface | |
| Communication interface | RS232 |

Electrical parameters

Power supply Adapter: 100 – 240V AC 50/60Hz 0.6A; 12V DC 1.2A Module: 12V DC

Environmental conditions

Operating temperature +10 – +40 °C

Relative humidity 40% – 80%

Physical parameters

Weighing pan dimensions \varnothing 100 mm

Device dimensions W x D x H 266x70x105 mm

Net weight 1.8 kg



Accessories (Additional Fee)

RS 232, RS 485 cables
Antivibration Tables

R Terminal (WDM-8)

Software (Additional Fee)

• R-Panel [WX-010-0187]

Device dimensions W x D x H

