
radwag.com

ANB 1.5Y Automatic Nano Balance

WL-115-0001

More information on the website
mirror.radwag.com/en/info,w1,QQ3

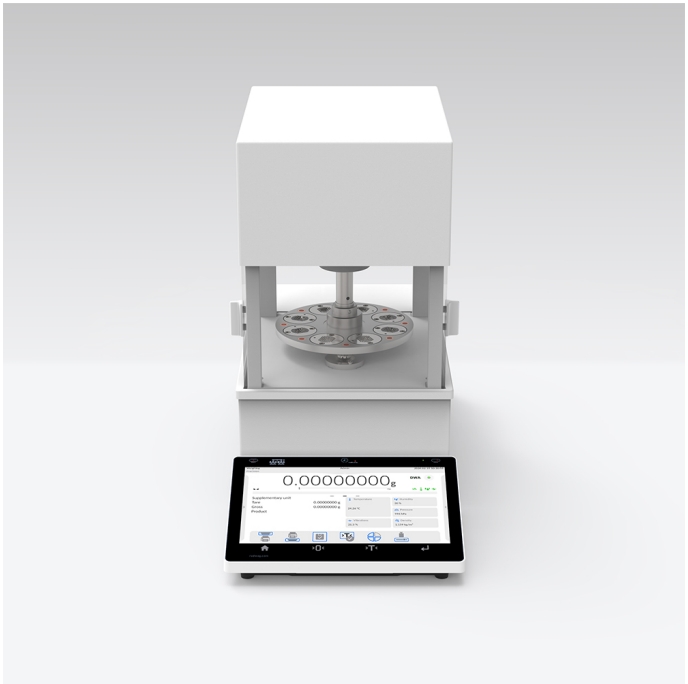

The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

Metrological parameters	
Maximum capacity [Max]	1 g
Readability [d]	10 ng
Tare range	-1 g
Standard repeatability [Max]	60 ng
Standard repeatability [5% Max]	30 ng
Permissible repeatability	100 ng
Linearity	±0.8 µg
Eccentricity (tested load)	0 µg
Electric compensation range	0 – 1 g
Sensitivity time drift	1×10^{-6}/Year×Rt
Stabilization time	30 s
Adjustment	internal (automatic)
Physical parameters	
Display	10" graphic colour touchscreen
Weighing pan dimensions	ø20 mm

Physical parameters	
Weighing device dimensions	385×245×390 mm
Controling device dimensions	460×250×195 mm
Packaging dimensions W x D x H	860×750×570 mm
Net weight	21 kg
Gross weight	31 kg
Magazine	8
Communication interface	
Communication interface	2×USB-A, USB-C, RS 232 (COM3), HDMI, Ethernet, Wi-Fi, Hotspot
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz
Environmental conditions	
Operating temperature	+15 – +30 °C
Operating temperature change rate	±0.5 °C / 12 h (±0.3 °C / 4 h)
Relative humidity	40% – 60%
Relative humidity change rate	±5% / 12 h (3% / 4 h)

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

