radwag.com

# IM01.EX-8/3/2 Communication Module

WX-016-0186

More information on the website
mirror.radwag.com/en/info,w1,QWG




The drawings, photos and graphics used are for illustrative purposes only.

## Datasheet


| | |
|---|---|
| **Construction** | |
| Protection class | IP 66 / 68 (1.5m) |
| ATEX Certification | II (2)G [Ex ib] IIC Gb<br>II (2)D [Ex ib] IIIC Db |
| Housing | aluminum |
| **Communication interface** | |
| Communication interface | 2×RS232, USB, 12IN / 12OUT, Ethernet, RS485, analog output 4-20 mA / 0-10 V |
| **Electrical parameters** | |
| Power supply | 100 – 240 V AC 50/60 Hz |
| Power consumption max. | 10 W |
| **Environmental conditions** | |
| Operating temperature | -10 – +40 °C |
| Storage temperature | -20 – +60 °C |
| Relative humidity | 10% – 85% RH no condensation |

| Physical parameters | |
|---|---|
| Device dimensions W x D x H | 222×146×81 mm |
| Net weight | 1.9 kg |
| Gross weight | 2.5 kg |

## Compatible with (Additional Fee)

HX5.EX-1.4P2 H Stainless Steel Beam Scales
HX5.EX-1 HR Stainless Steel 1-Load-Cell Platform Scales
RS 232 cables (scale - printer)
HX5.EX-1.4P2 C Beam Scales
HX5.EX-1.4N Stainless Steel Ramp Scales
HX5.EX-1.4 C 4-Load-Cell Platform Scales
HX5.EX-1.4P H Stainless Steel Pallet Scales
HX5.EX-1.4 H/Z Stainless Steel Platform Scales, Pit Version
HX5.EX-1 C 1-Load-Cell Platform Scales
HX5.EX-1 H Waterproof Platform Scales
PUE HX5.EX Weighing Terminal
HX5.EX-1.4 H Stainless Steel 4-Load-Cell Platform Scales
RS 232, RS 485 cables
IN/OUT Cables
HX5.EX-1.4P C Pallet Scales
USB adatper
USB cable (scale - printer)
RS 232 – USB Converter

## Device dimensions W x D x H

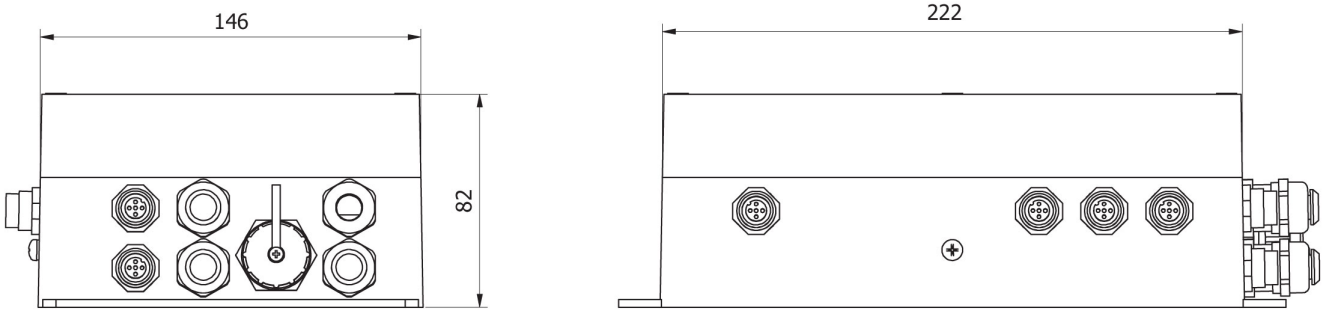


IM01.EX