



More information on the website
mirror.radwag.com/en/info,w1,UFX

PM02.EX-2-2 Intrinsically Safe Power Supply Intended for Ex Scale

WX-004-0258



The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

Physical parameters	
Cable length	10 m
Device dimensions W x D x H	216x174x64 mm
Construction	
Protection class	IP 66 / 68
ATEX Certification	II (2)G [Ex ib Gb] IIC II (2)D [Ex ib Db] IIIC
Housing	Stainless steel
Working in zones	-
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz
Power consumption max.	15 W
Environmental conditions	
Operating temperature	-20 – +40 °C
Storage temperature	-20 – +60 °C

Environmental conditions

Relative humidity

10% – 85% RH no condensation






Compatible with (Additional Fee)

Stainless Steel HRP EX.H Platforms
HRP Platforms High Capacity

Stainless steel HRP.H platforms
HRP EX Platforms High Capacity

Device dimensions W x D x H

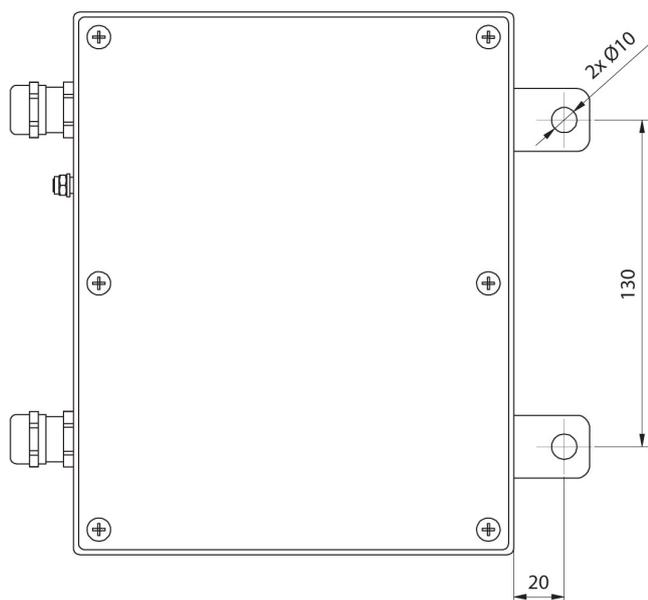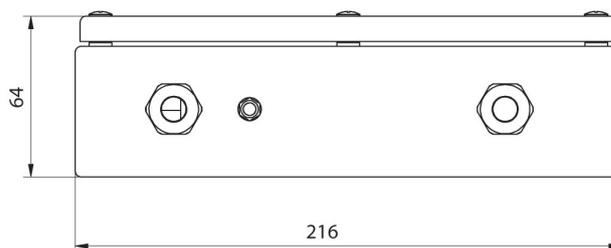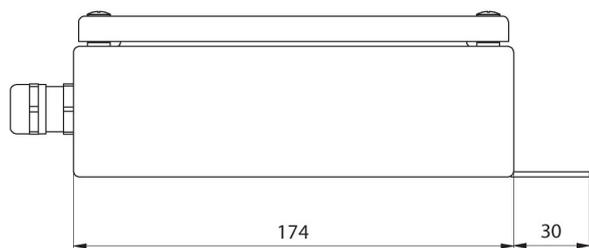

PM01.EX