



More information on the website  
[mirror.radwag.com/it/info,w1,UFX](https://mirror.radwag.com/it/info,w1,UFX)

# PM02.EX-2-2 intrinsically safe power supply intended for EX scale

WX-004-0258



The drawings, photos and graphics used are for illustrative purposes only.

## Specifiche

Parametri fisici	
Lunghezza del cavo	10 m
Device dimensions	216×174×64 mm
Costruzione	
Punteggio IP	IP 66 / 68
Certificazione ATEX	II (2)G [Ex ib Gb] IIC II (2)D [Ex ib Db] IIIC
Struttura	Stainless steel
Lavorare in zone	-
Parametri elettrici	
Alimentatore	100 – 240 V AC 50/60 Hz
Massimo assorbimento elettrico	15 W
Environmental conditions	
Ambiente di lavoro	-20 – +40 °C
Temperatura di stoccaggio	-20 – +60 °C

## Environmental conditions

Umidità relativa

10% – 85% RH no condensation






## Compatibile con (Additional Fee)

Piattaforme in acciaio inox HRP EX.H  
Piattaforme HRP verniciata a polvere

Piattaforme in acciaio inox HRP.H  
Piattaforme HRP EX verniciata a polvere

## Device dimensions

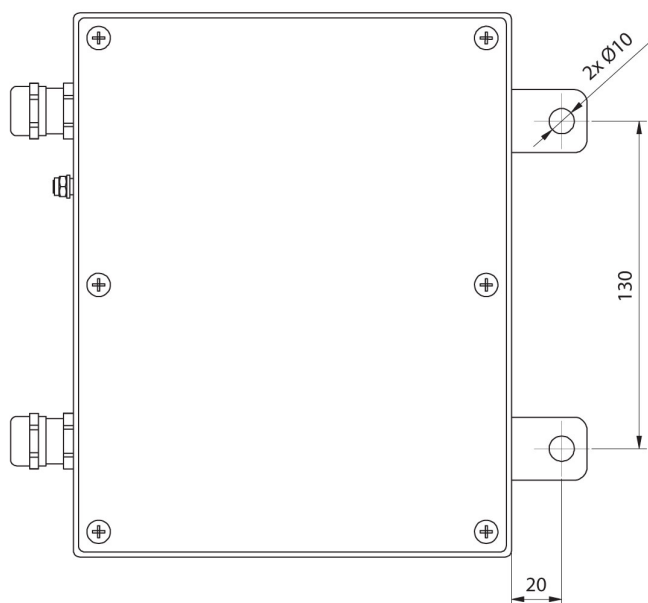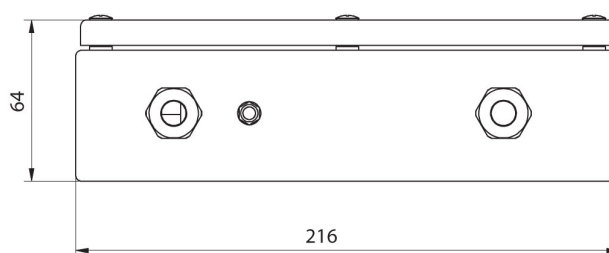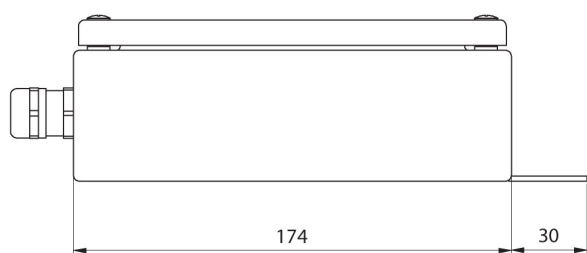

PM01.EX