



# PM02.EX-2-2 intrinsically safe power supply intended for EX scale

WX-004-0258

More information on the website  
[mirror.radwag.com/us/info,w1,UFX](http://mirror.radwag.com/us/info,w1,UFX)



The drawings, photos and graphics used are for illustrative purposes only.

## Datasheet

Physical parameters	
Cable length	10 m
Device dimensions W x D x H	216×174×64 mm
Construction	
Protection class	IP 66 / 68
ATEX Certification	II (2)G [Ex ib Gb] IIC II (2)D [Ex ib Db] IIIC
Housing	Stainless steel
Working in zones	-
Power	
Power supply	100 – 240 V AC 50/60 Hz
Power consumption max.	15 W
Temperature	
Operating temperature	-20 – +40 °C
Storage temperature	-20 – +60 °C
Relative humidity	10% – 85% RH no condensation






## Compatible with (Additional Fee)

Stainless steel HRP EX.H platforms  
HRP Platforms High Capacity

Stainless steel HRP.H platforms  
HRP EX Platforms High Capacity

## Device dimensions W x D x H

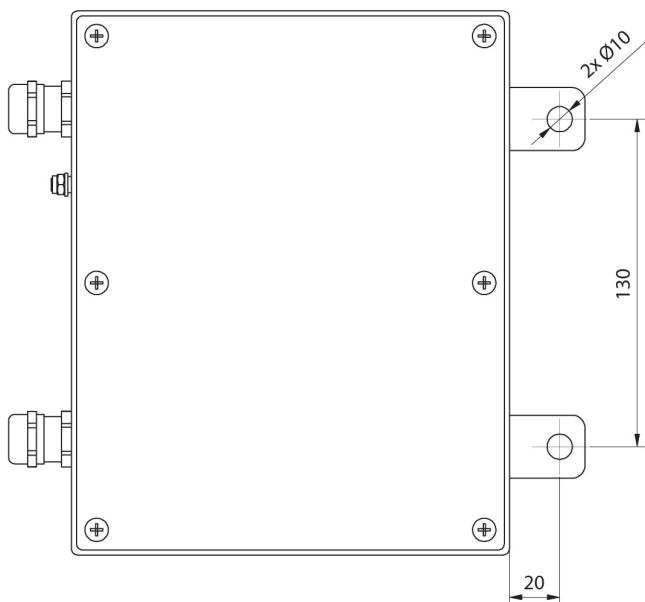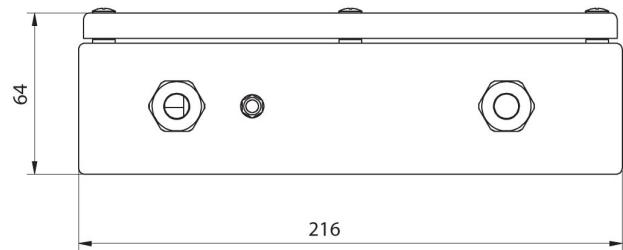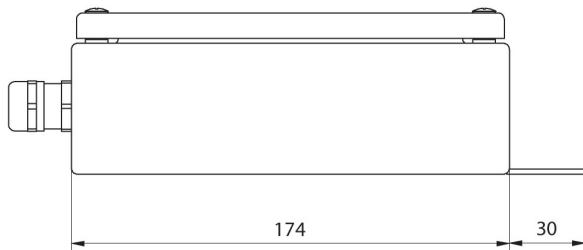

PM01.EX