

## PM02.EX-2-2 intrinsically safe power supply intended for EX scale WX-004-0258





The drawings, photos and graphics used are for illustrative purposes only.

## **Datasheet**


| Physical parameters         |  |
|-----------------------------|--|
| Cable length                | 10 m   |
| Device dimensions W x D x H | 216×174×64 mm                                  |
| Construction                |  |
| Protection class            | IP 66 / 68                                     |
| ATEX Certification          | II (2)G [Ex ib Gb] IIC II (2)D [Ex ib Db] IIIC |
| Housing                     | Stainless steel                                |
| Working in zones            | -  |
|                             |  |
| Power supply                | 100 – 240 V AC 50/60 Hz                        |
| Power consumption max.      | 15 W   |
|                             |  |
| Operating temperature       | -20 - +40 °C                                   |
| Storage temperature         | -20 - +60 °C                                   |
| Relative humidity           | 10% – 85% RH no condensation                   |





## **Compatible with (Additional Fee)**

Stainless steel HRP EX.H platforms HRP Platforms High Capacity Stainless steel HRP.H platforms HRP EX Platforms High Capacity

## Device dimensions W x D x H

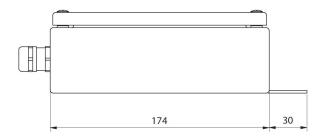

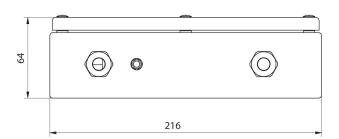

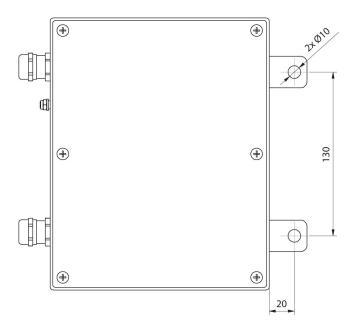

PM01.EX