WPY 3/F1/R Multifunctional Scale

WP-111-0065

The drawings, photos and graphics used are for illustrative purposes only.

Functions

Dosing	Labelling	Plus/Minus Control	Percent Weighing
Totalizing	Parts counting	Peak hold	Formulation
Newton unit measurement	Statistics	Checkweighing	IR sensors
Animal weighing	Differential weighing	ALIBI Memory	

Datasheet

Maximum capacity [Max]	3 kg
Minimum load	20 g
Readability [d]	1 g
Verification unit [e]	1 g
Tare range	-3 kg
Max readability for non-verified scale	0,2 g

Stabilization time	2 s
Adjustment	external
OIML Class	III
Physical parameters	
Display	5,7" Resistive Color Touchscreen
Weighing pan dimensions	300×300 mm
Packaging dimensions W x D x H	570×390×170 mm
Net weight	5,3 kg
Gross weight	6,1 kg
Construction	
Protection class	IP 65 construction, IP 43 terminal
Communication interface	2×RS232, 2×USB-A, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi
Power supply	100 – 240 V AC 50/60 Hz
Operating temperature	-10 – +40 °C

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.

CE M   Additional fee for verification   2 YEARS

Accessories (Additional Fee)

Transponder card readers
RS 232 cables (scale - printer)
Cigarette lighter receptacle power supply cables
Barcode scanners
RS 232, RS 485 cables
Label Printers
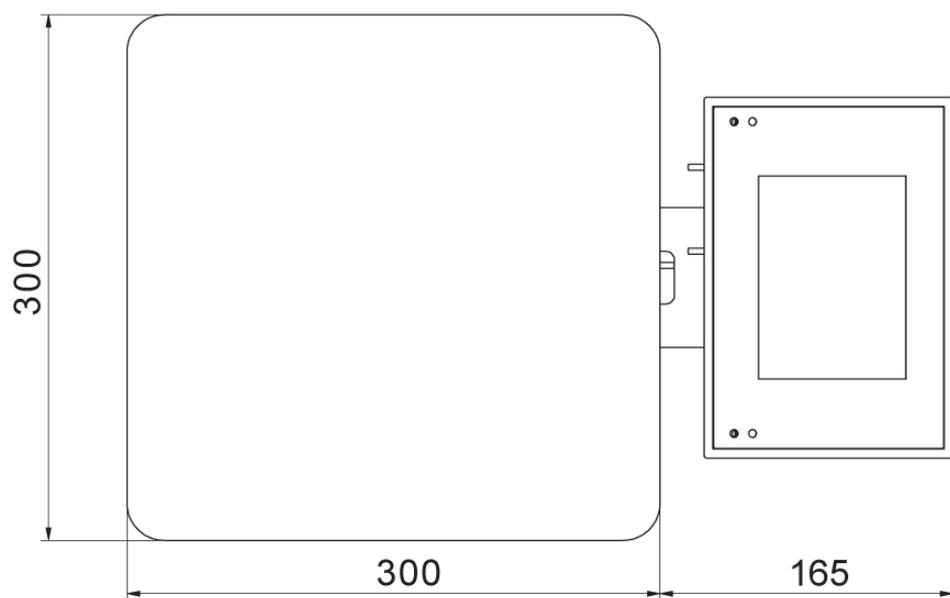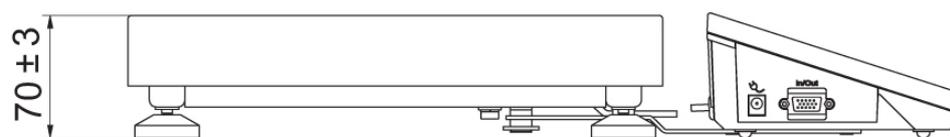Antivibration tables
Displays

IN/OUT Cables
!Keypad, external switches
Stands, wall mounting kits and mounting brackets
Receipt Printer
F1 Mass Standard -
knob weights without adjustment chamber, set
AP2-1 Current Loop Unit
Additional Weighing platforms Module
RS 232 – USB Converter

Software (Additional Fee)

• E2R Weighing [WX-010-0099]
• Audit Trail Reader [WX-010-0186]
• RADWAG Remote Desktop [WX-010-0107]
• RADWAG Development Studio [WX-010-0104]

• RAD Key [WX-010-0005]
• Label Editor R02 [WX-010-0094]
• Scale Editor - EWAG 2.1 [WX-010-0173]

Device dimensions W x D x H

70 ±3

300

300

165

WPY F1/R