



# Plataforma de pesagem C315.4.6000.C9

WP-230-0019

More information on the website  
[mirror.radwag.com/br/info,w1,W62](http://mirror.radwag.com/br/info,w1,W62)



The drawings, photos and graphics used are for illustrative purposes only.

## Funções

 Plus/Minus Control

 % Percent Weighing

  $\Sigma$  Totalizing

 Parts counting

 Internal battery

 MAX Peak hold

  $\text{N}$  Newton unit measurement

 GLP GLP Procedures

 Animal weighing

 ALIBI Memory

## Ficha Técnica

### Parâmetros metrológicos

Capacidade máxima [máx] 6000 kg

Carga mínima 40 kg

Resolução [d] 2 kg

Faixa de tara -6000 kg

Resolução máxima para plataforma não verificada 500 g

Classe OIML III

<b>Parâmetros físicos</b>	
Display	4,3" LCD (retroiluminado)
Comprimento até cabo	3 m
Dimensões até prato de pesagem	1500×1500 mm
Altura da plataforma de pesagem	160 ± 10 mm
Dimensões da embalagem L x P x A	1600×1600×500 mm
Plataforma com indicador	230 kg
<b>Construção</b>	
Classe de proteção	IP 65 construção, IP 67 célula, IP 43 terminal
<b>Interface de comunicação</b>	
Interface de comunicação	RS232
Interfaces opcionais	RS232
<b>Parâmetros elétricos</b>	
Fonte de alimentação	100 – 240 V AC 50/60 Hz e bateria
Consumo de energia máx.	5 W
Tempo de operação com baterias	max 8h
<b>Condições ambientais</b>	
Temperatura de operação	-10 – +40 °C
Umidade relativa	10% – 85% RH sem condensação



Additional fee for verification



## Acessórios (Additional Fee)

Adaptadores de energia

Cabos de alimentação para acendedor de cigarro automotivo

Displays

RS 232, RS 485 cabos

Conversor RS 232 – Ethernet

RS 232 – Conversor USB

Cabos RS 232 (plataforma - impressora)

Conversor RS 232 – RS 485


Impressora de recibos

## Software (Additional Fee)

• RAD Key [WX-010-0005]

• R-Lab [WX-010-0080]

## Dimensões do dispositivo L x P x A

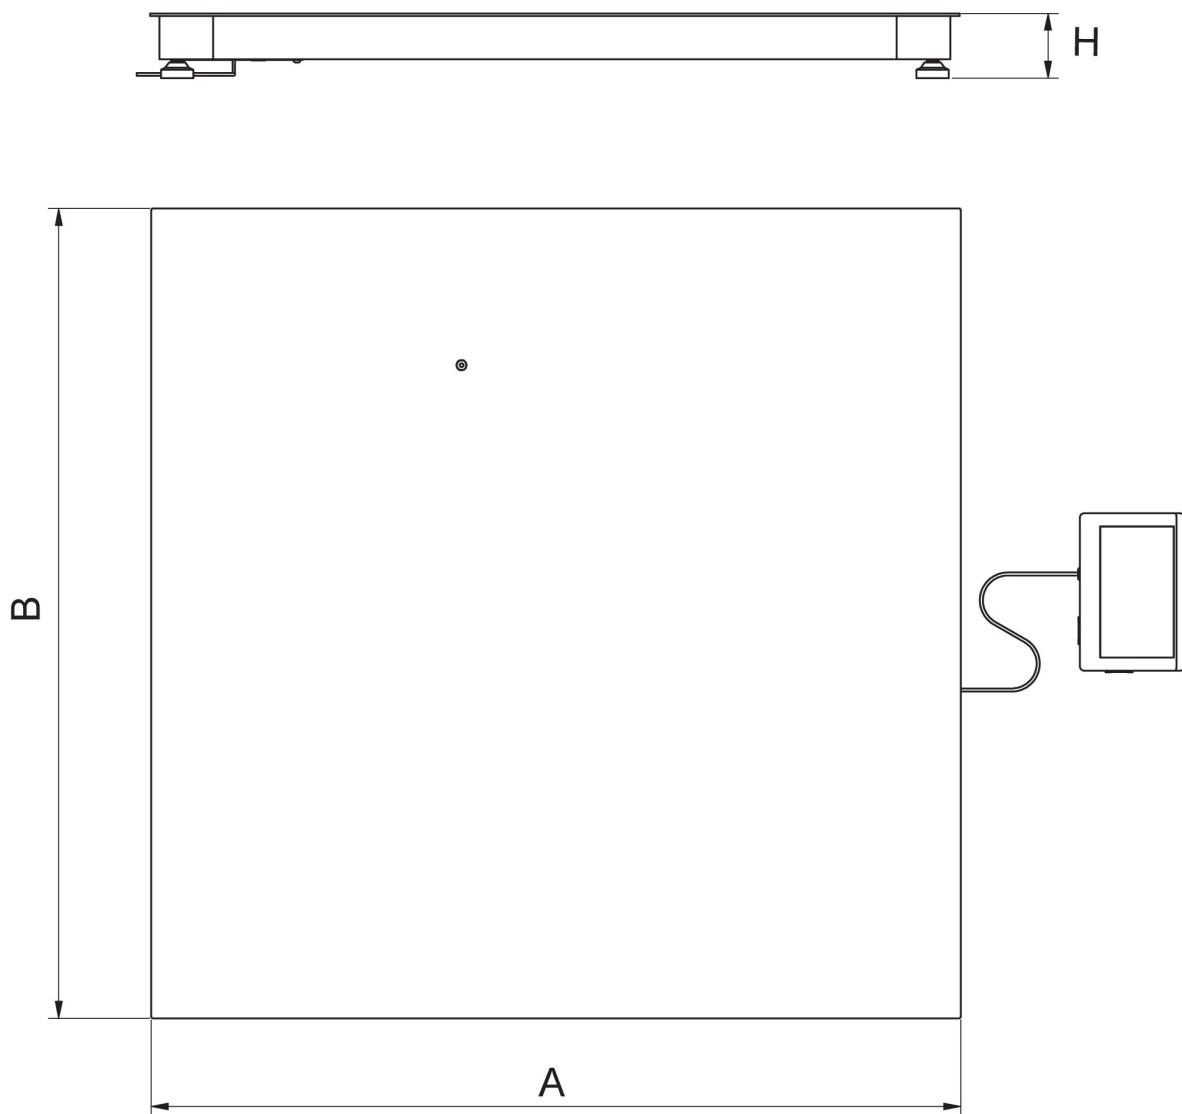

	A	B	H
C6	800	800	120 ±10
C7	1000	1000	120 ±10
C8	1200	1200	120 ±10
C8/9	1200	1500	120 ±10
C9	1500	1500	120 ±10
6000.C9	1500	1500	160 ±10