



More information on the website  
[mirror.radwag.com/en/info,w1,WXS](http://mirror.radwag.com/en/info,w1,WXS)

# WLC 12/30/F1/R Precision Balance

WL-214-1035



The drawings, photos and graphics used are for illustrative purposes only.

## Functions

 Plus/Minus Control

 Percent Weighing

 Totalizing

 Parts counting

 Internal battery

 Peak hold

 Newton unit measurement

## Datasheet

Metrological parameters	
Maximum capacity [Max]	12 / 30 kg
Minimum load	-
Readability [d]	0.2 / 0.5 g
Verification unit [e]	-
Tare range	-30 kg
Repeatability	0.2 / 0.5 g
Linearity	±0.6 / 1.5 g
Stabilization time	3 s
Adjustment	external

Metrological parameters	
OIML Class	-
Physical parameters	
Leveling system	manual
Display	4.3" LCD (backlit)
Weighing pan dimensions	300×300 mm
Packaging dimensions W x D x H	570×390×170 mm
Net weight	4.95 kg
Gross weight	6 kg
Construction	
Protection class	IP 43
Communication interface	
Communication interface	RS232
Electrical parameters	
Power supply	Adapter: 100 – 240V AC 50/60Hz 0.6A; 12V DC 1.2A Balance: 10 – 15VDC 0.6A max
Operation time on batteries	10 h (average time)
Environmental conditions	
Operating temperature	+15 – +30 °C
Relative humidity	10% – 85% RH no condensation

**Repeatability** is expressed as a standard deviation from 10 weighing cycles.

**Stabilization time** depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile.



## Accessories (Additional Fee)

Antivibration Tables  
Power Adapters  
RS 232 cables (scale - printer)  
Cigarette lighter receptacle power supply cables  
Displays  
RS 232, RS 485 cables

RS 232 – Ethernet Converter  
AP2-1 Current Loop Unit  
RS 232 – USB Converter  
RS 232 – RS 485 Converter  
Receipt Printer

## Software (Additional Fee)


• RAD Key [WX-010-0005]  
• Scale Editor 2.1 [WX-010-0173]

• R-Lab [WX-010-0080]

# Device dimensions W x D x H



WLC A2

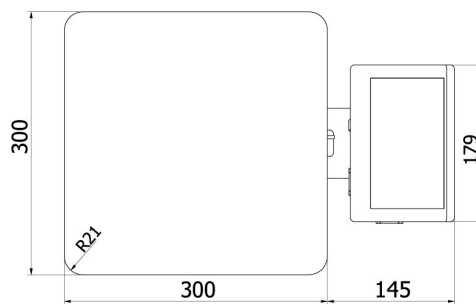

WLC F1/K

WLC F1/R



WLC C2/K

WLC C2/R