

AS 310.X7 Analytical Balance

WL-113-0005



Percent Weighing



The drawings, photos and graphics used are for illustrative purposes only.

Functions

Statistics

GLP Procedures

Replaceable unit

Autotest Dosing -OK+ Plus/Minus Control

Parts counting Peak hold Formulation

Checkweighing

IR sensors

Animal weighing

Density determination

Animal weighing

Density determination

SQC Statistical Quality Control

ALIBI Memory

Formulation

Newton unit measurement

IR sensors

Under-pan weighing

Ambient conditions monitoring

ALIBI Memory

Mass for titrator

Datasheet

Wi-Fi

Maximum capacity [Max]	310 g
Minimum load	10 mg
Readability [d]	0,1 mg

Verification unit [e]	1 mg
Tare range	-310 g
Standard repeatability [5% Max]	0,07 mg
Standard repeatability [Max]	0,1 mg
Standard minimum weight (USP)	140 mg
Standard minimum weight (U=1%, k=2)	14 mg
Permissible repeatability [5% Max]	0,12 mg
Permissible repeatability [Max]	0,15 mg
Linearity	±0,3 mg
Stabilization time	2,5 s
Adjustment	internal (automatic)
OIML Class	I
Physical parameters	
Leveling system	semi-automatic – LevelSENSING
Display	7" graphic colour touchscreen
Weighing chamber doors	manual
Delivery components	Balance, weighing pan, weighing pan shield, bottom cover, power supply.
Weighing chamber dimensions	190×190×222 mm
Weighing pan dimensions	ø100 mm
Packaging dimensions W x D x H	490×400×520 mm
Net weight	7,32 kg
Gross weight	9,3 kg
Construction	
Protection class	IP 43
Database capacity	Products, Users, Packaging, Customers, Formulations, Formulations reports, Ambient Conditions, Weighings, Alibi memory
Features of use	
Touch-free operation	2 IR Sensors
Communication interface	RS232, 2×USB-A (interchangeable), USB-B, Wi-Fi, Ethernet
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,8A max
Power consumption max.	4 W
Operating temperature	+10 - +40 °C
Ambient conditions monitoring (option)	THBR 2.0 System, THBR BOX, THB P, THB W, THB S
Relative humidity	40% - 80%
Daniel Alberta Communication of the Communication for the	10

Repeatability is expressed as a standard deviation from 10 weighing cycles. **Stabilization time** depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile.

¹ Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

^{*} Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Accessories (Additional Fee)

Antivibration tables
Holders for laboratory flasks
Power Adapters
Cigarette lighter receptacle power supply cables
Density determination KIT
USB cable (scale - printer)
Professional Weighing Tables
Barcode scanners
Holders for test tubes and filters
Workstation for pipettes calibration
RS 232, RS 485 cables


THBR 2.0 System - Ambient Conditions Monitoring Displays
Protective cover for balances
Weighing dishes
Antistatic ionizer
Receipt Printer
Additional modules
Under-pan weighing
RS 232 cables (scale - printer)
RS 232 - RS 485 Converter


Software (Additional Fee)

- RAD Key [WX-010-0005]
- Scale Editor EWAG 2.1 [WX-010-0173]

- · Alibi Reader PC Software [WX-010-0114]
- RADWAG Development Studio [WX-010-0104]

Device dimensions W x D x H

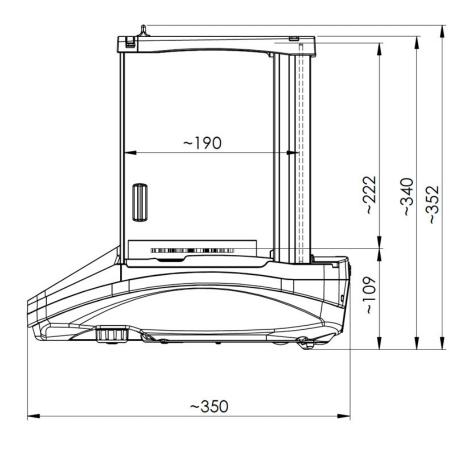

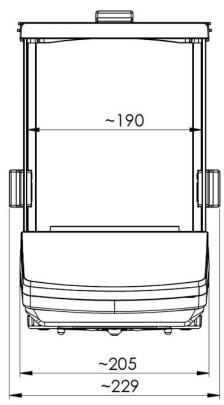

radwag.com