radwag.com

C315.4P2.4000.C1 Kiriş Terazi

WP-240-0005

More information on the website
mirror.radwag.com/tr/info,w1,YF8



The drawings, photos and graphics used are for illustrative purposes only.

Fonksiyonlar

- Plus/Minus Control
- Percent Weighing
- Totalizing
- Parts counting
- Internal battery
- Peak hold
- Newton unit measurement
- GLP Procedures
- Animal weighing
- ALIBI Memory

Teknik Veriler

Metrolojik parametreler	
Maksimum yük [Max]	4000 kg
Minimum yük [Min]	40 kg
Okuma içinğruluğu [d]	2 kg
Yasallaştırma birimi [e]	2 kg
Dara aralığı	-4000 kg
OIML sınıfı	III

Fiziksel parametreler	
Display	4,3” LCD (aydınlatma ile)
Kablo uzunluğu	3 m + 5 m
Tartım kefesi boyutları	2 adet 2 m
Cihaz boyutları G x D x Y	2000×120×155 mm
Göstergeli terazi kütlesi	90 kg
Konstrüksiyon	
IP Sınıfı	IP 65 konstrüksiyon, IP 67 gerinim ölçer, IP 43 terminal
Haberleşme arayüzler	
Haberleşme arayüzü	RS232
Opsiyonel arayüzler	RS232
Elektrik parametreleri	
Güç kaynağı	100 – 240 V AC 50/60 Hz + batarya
Maksimum güç tüketimi	5 W
Batarya ile çalışma süresi	max 8h
Çevresel koşullar	
Çalıştırma sıcaklığı	-10 – +40 °C
Atmosferik nem	10% – 85% RH yoğunlaşma yok





Additional fee for verification

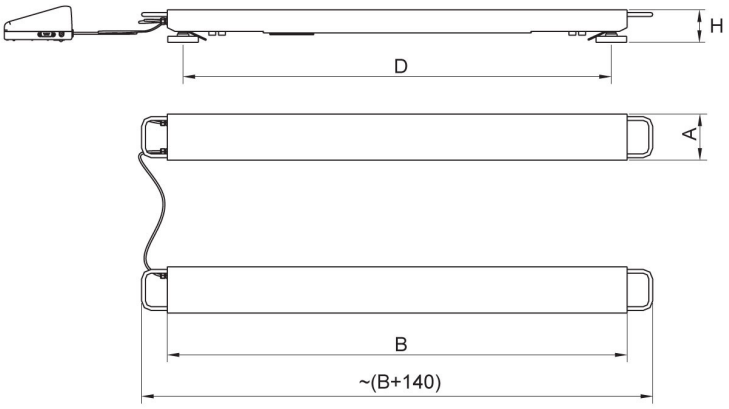

Aksesuarlar (Additional Fee)

Güç adaptörü
RS 232 Kablolar (Teraziler - Yazıcı)
Tartım terminalleri için tutucular
Çakmak prizine uygun besleme kabloları
Display
RS 232 – Ethernet Dönüştürücü
AP2-1 Güç döngüsü çıkışı
RS 232, RS 485 Kablolari
RS 232 – USB Dönüştürücü
Kablolar RS 232 (Teraziler - Yazıcı)
RS 232 – RS 485 Dönüştürücü
Fiş yazıcı

Yazılım (Additional Fee)

• RAD Key [WX-010-0005]
• Terazi Editörü - EWAG 2.1 [WX-010-0173]
• R-Lab [WX-010-0080]

Cihaz boyutları G x D x Y



Scale type	A	B	H	D
C315.4P2.600.C	120	1200	85	1100
C315.4P2.1500.C	120	1200	85	1100
C315.4P2.3000.C	120	1200	85	1100
C315.4P2.2000.C1	120	2000	105	1900
C315.4P2.2000.C2	120	2500	105	2400
C315.4P2.4000.C1	120	2000	155	1880
C315.4P2.4000.C2	120	2500	155	2380
C315.4P2.6000.C1	120	2000	155	1880
C315.4P2.6000.C2	120	2500	155	2380

dimensions in mm