HX5.EX-1.15.HR3 Tek Yük Hücreli Platform Terazi

WW-007-0006

More information on the website
mirror.radwag.com/tr/info,w1,YGV



The drawings, photos and graphics used are for illustrative purposes only.

Fonksiyonlar

- Labelling
- Plus/Minus Control
- Percent Weighing
- Parts counting
- Newton unit measurement
- Statistics
- GLP Procedures
- Replaceable unit
- ALIBI Memory

Teknik Veriler

Metrolojik parametreler	
Maksimum yük [Max]	15 kg
Minimum yük [Min]	100 g
Okuma içinğruluğu [d]	5 g
Yasallaştırma birimi [e]	5 g
Dara aralığı	-15 kg
OIML sınıfı	III

Fiziksel parametreler	
Display	5” grafik renkli
Kablo uzunluğu	2,5 m
Tartım kefesi boyutları	410×410 mm
Ambalaj boyutları G x D x Y	510×640×490 mm
Net ağırlık	16,1 kg
Brüt ağırlık	19,5 kg
Konstrüksiyon	
IP Sınıfı	IP 66 / 67 / 69 konstrüksiyon, IP 66 / 68 terminal
Sertifikasyon ATEX	II 2G Ex ib IIC T4 Gb II 2D Ex ib IIIC T135°C Db
Sertifikasyon IECEx	Ex ib IIC T4 Gb Ex ib IIIC T135°C Db
Konstrüksiyon	Paslanmaz çelik AISI316
Tartım kefesi	Paslanmaz çelik AISI316
Haberleşme arayüzler	
Haberleşme arayüzü	2×RS232, RS485
Elektrik parametreleri	
Güç kaynağı	100 – 240 V AC 50/60 Hz
Maksimum güç tüketimi	15 W
Çevresel koşullar	
Çalıştırma sıcaklığı	-10 – +40 °C
Atmosferik nem	10% – 85% RH yoğunlaşma yok
İndikatör	PUE HX5.EX-1

Additional fee for verification

Aksesuarlar (Additional Fee)

Haberleşme modülü
Terazi için tasarlanmış kendinden korumalı güç kaynağı
Fiş yazıcı

Yazılım (Additional Fee)


- E2R Tartım [WX-010-0099]
- Etiket Editörü R02 [WX-010-0094]
- R-Lab [WX-010-0080]
- RADWAG Development Studio [WX-010-0104]
- RAD Key [WX-010-0005]
- Alibi Okuyucu PC Yazılımı [WX-010-0114]
- Terazi Editörü - EWAG 2.1 [WX-010-0173]

Cihaz boyutları G x D x Y


Scale type	A1	A2	B
HX5.EX-1.HR2	250	300	103±3
HX5.EX-1.HR3	410	410	98±2
HX5.EX-1.HR4	500	500	155±5
HX5.EX-1.HR3/5	400	600	155±5
HX5.EX-1.HR5	600	600	155±5

Dimensions in mm



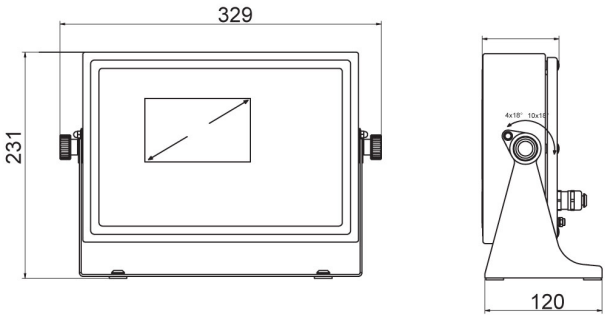

PUE HX5.EX-1

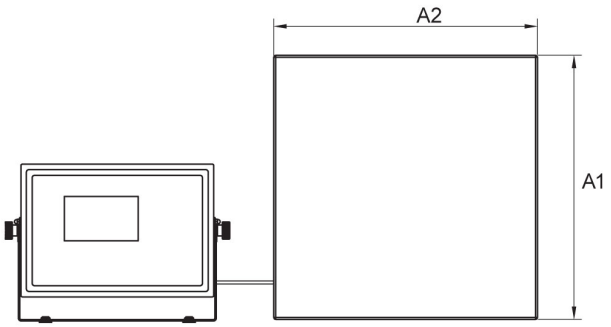

Platform H