radwag.com

Basamento ad una cella di carico HX5.EX-1.150.HR3/5

WW-007-0017

More information on the website
mirror.radwag.com/it/info,w1,YU1



The drawings, photos and graphics used are for illustrative purposes only.

Funzioni

- Labelling
- Plus/Minus Control
- Percent Weighing
- Parts counting
- Newton unit measurement
- Statistics
- GLP Procedures
- Replaceable unit
- ALIBI Memory

Specifiche

Parametri metrologici	
Portata massima [Max]	150 kg
Portata minima [Min]	1 kg
Divisione [d]	50 g
Intervallo di verifica della bilancia [e]	50 g
Campo di tara	-150 kg
Classe OIML	III

Parametri fisici	
Display	5” graphic colour
Lunghezza del cavo	2,5 m
Dimensione piatto	400×600 mm
Dimensioni del pacco L x P x A	490×680×450 mm
Costruzione	
Punteggio IP	IP 66 / 67 / 69 construction, IP 66 / 68 terminal
Certificazione ATEX	II 2G Ex ib IIC T4 Gb II 2D Ex ib IIIC T135°C Db
Certificazione IECEx	Ex ib IIC T4 Gb Ex ib IIIC T135°C Db
Costruzione	Stainless steel AISI316
Materiale da pesata	Stainless steel AISI316
Interfaccia di comunicazione	
Interfaccia	2×RS232, RS485
Parametri elettrici	
Alimentatore	100 – 240 V AC 50/60 Hz
Massimo assorbimento elettrico	15 W
Environmental conditions	
Ambiente di lavoro	-10 – +40 °C
Umidità relativa	10% – 85% RH no condensation
Indicatore	PUE HX5.EX-1

Additional fee for verification

Accessori (Additional Fee)

Moduli di comunicazione
Alimentatore a sicurezza intrinseca per bilance EX per alimentare il misuratore PUE HX5.EX

Stampanti di ricevuta

Software (Additional Fee)


- E2R Weighing [WX-010-0099]
- Editore di etichette R02 [WX-010-0094]
- R-LAB [WX-010-0080]
- Software „Development Studio” RADWAG [WX-010-0104]
- RAD Key [WX-010-0005]
- „Alibi Reader” PC Software [WX-010-0114]
- Editore per sistemi di pesatura 2.1 [WX-010-0173]

Device dimensions L x P x A


Scale type	A1	A2	B
HX5.EX-1.HR2	250	300	103±3
HX5.EX-1.HR3	410	410	98±2
HX5.EX-1.HR4	500	500	155±5
HX5.EX-1.HR3/5	400	600	155±5
HX5.EX-1.HR5	600	600	155±5

Dimensions in mm



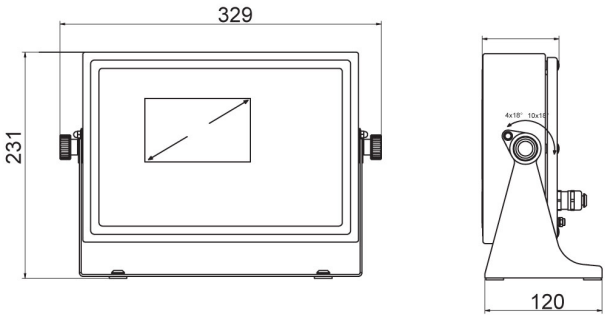

PUE HX5.EX-1

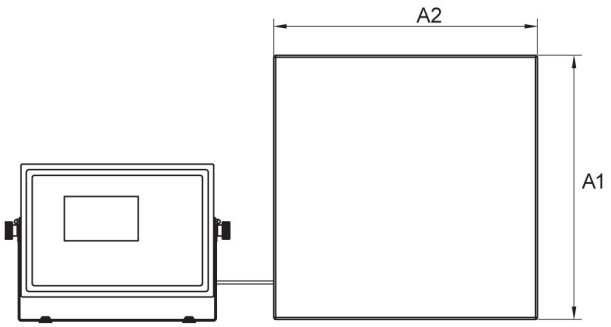

Platform H