radwag.com

High Resolution Platforms
PL.2000.HRP.EX.H

WX-009-0289

More information on the website
mirror.radwag.com/en/info,w1,ZKF



The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

Metrological parameters	
Maximum capacity [Max]	2000 kg
Preload range	200 kg
Readability [d]	10 g
Tare range	-2000 kg
Repeatability	30 g
Linearity	±60 g
Adjustment	internal (automatic)
Physical parameters	
Cable length	10 m
Weighing pan dimensions	1250×1000 mm
Net weight	290 kg
Gross weight	415 kg
Construction	
Protection class	IP 66 / 67

Construction	
ATEX Certification	II 3G Ex ic IIC T4 Gc II 3D Ex ic IIIC T60ºC Dc
IECEx Certification	Ex ic IIC T4 Gc Ex ic IIIC T60ºC Dc
Construction	Stainless steel AISI304
Weighing pan material	Stainless steel AISI304
Communication interface	
Communication interface	RS485
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz
Environmental conditions	
Operating temperature	+10 – +40 °C
Relative humidity	15% – 80%




Accessories (Additional Fee)

PUE HX5.EX Weighing Terminal
Ex-Scale-Intended Intrinsically Safe Power Supply for PUE HX5.EX Weighing Terminal
Receipt Printer


Software (Additional Fee)

• MWMH Manager [WX-010-0103]
• RADWAG Development Studio [WX-010-0104]
• RAD Key [WX-010-0005]

Device dimensions W x D x H

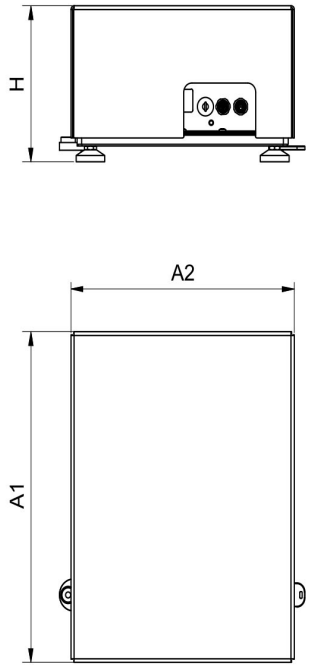

PL.16 - 32.HRP.H

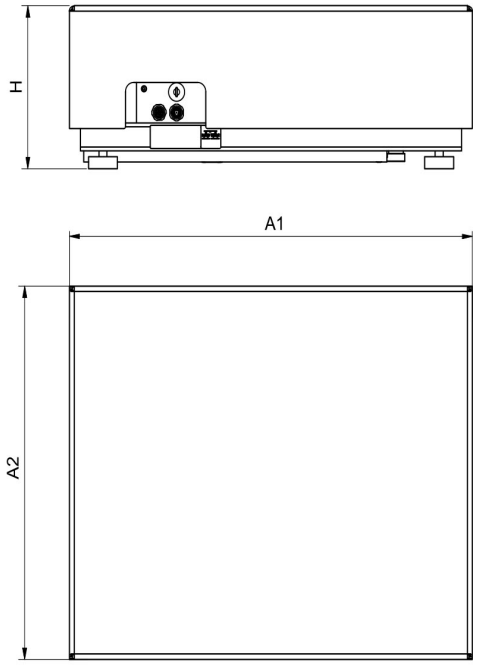

PL.62-2000.HRP.H

Scale type	A1	A2	H
PL.(16-32).HRP.H	360	280	180±5
PL.(62-150).HRP.H	500	400	180±5
PL.150.2.HRP.H	500	500	180±5
PL.(150.1-300).HRP.H	800	600	180±5
PL.(300.1-1100).HRP.H	1000	800	180±5
PL.(2000).HRP.H	1250	1000	180±5

Dimensions in mm