




More information on the website
mirror.radwag.com/en/info,w1,1Q6

C32.150.C3.M Multifunctional Scale

WP-120-0032

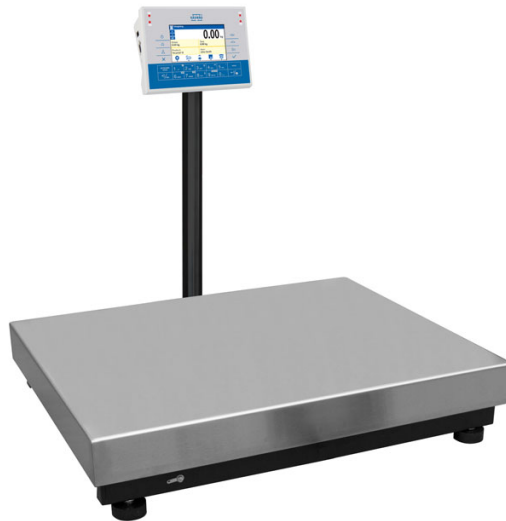

The drawings, photos and graphics used are for illustrative purposes only.

Functions



Labelling



Plus/Minus Control



Percent Weighing



Totalizing



Parts counting



Newton unit measurement



Statistics



IR sensors



GLP Procedures



Replaceable unit



ALIBI Memory

Datasheet

| Metrological parameters | |
|--|---------|
| Maximum capacity [Max] | 150 kg |
| Minimum load | 1 kg |
| Readability [d] | 50 g |
| Verification unit [e] | 50 g |
| Tare range | -150 kg |
| Max readability for non-verified scale | 5 g |
| OIML Class | III |

| Physical parameters | |
|--------------------------------|--|
| Display | 5" graphic colour |
| Weighing pan dimensions | 700×500 mm |
| Packaging dimensions W x D x H | 730×800×270 mm |
| Net weight | 23.4 kg |
| Gross weight | 27.2 kg |
| Construction | |
| Protection class | IP 65 construction, IP 43 terminal |
| Construction | mild steel St3S |
| Weighing pan material | Stainless steel AISI304 |
| Communication interface | |
| Communication interface | 2×RS232, USB-A, USB-B, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi |
| Electrical parameters | |
| Power supply | 100 – 240 V AC 50/60 Hz |
| Power consumption max. | 10 W |
| Optional power supply | internal rechargeable battery |
| Operation time on batteries | operation time up to 5 h |
| Environmental conditions | |
| Operating temperature | -10 – +40 °C |

* Optional equipment at additional cost

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Additional fee for verification



Accessories (Additional Fee)

Displays

Power Adapters

RS 232 cables (scale - printer)

Cigarette lighter receptacle power supply cables

Barcode scanners

RS 232, RS 485 cables

Label Printers

Keypad, external switches

Stands, wall mounting kits and mounting brackets

Additional modules

Receipt Printer

AP2-1 Current Loop Unit

Software (Additional Fee)

• E2R Weighing [WX-010-0099]

• Label Editor R02 [WX-010-0094]

• R-Lab [WX-010-0080]

• RADWAG Development Studio [WX-010-0104]

• RAD Key [WX-010-0005]

• Alibi Reader [WX-010-0114]

• Scale Editor 2.1 [WX-010-0173]

Device dimensions W x D x H



C32.C3.K



C32.C3.M