



More information on the website
mirror.radwag.com/us/info,w1,H72

C32.15.F1.M Multifunctional Scale

WP-120-0015



The drawings, photos and graphics used are for illustrative purposes only.

Functions



Labelling



Plus/Minus Control



Percent Weighing



Totalizing



Parts counting



Newton unit measurement



Statistics



IR sensors



GLP Procedures



Replaceable unit



ALIBI Memory

Datasheet

| Metrological parameters | |
|--|--------|
| Maximum capacity [Max] | 15 kg |
| Minimum load | 100 g |
| Readability [d] | 5 g |
| Verification unit [e] | 5 g |
| Tare range | -15 kg |
| Max readability for non-verified scale | 0,5 g |
| OIML Class | III |

| Physical parameters | |
|--------------------------------|--|
| Display | 5" graphic colour |
| Weighing pan dimensions | 300×300 mm |
| Packaging dimensions W x D x H | 570×390×170 mm |
| Net weight | 5,3 kg |
| Gross weight | 6,6 kg |
| Construction | |
| Protection class | IP 65 construction, IP 43 terminal |
| Construction | mild steel St3S |
| Weighing pan material | Stainless steel AISI304 |
| Communication interface | |
| Communication interface | 2×RS232, USB-A, USB-B, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi |
| Electrical parameters | |
| Power supply | 100 – 240 V AC 50/60 Hz |
| Power consumption max. | 10 W |
| Optional power supply | internal rechargeable battery |
| Operation time on batteries | operation time up to 5 h |
| Environmental conditions | |
| Operating temperature | -10 – +40 °C |

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Additional fee for verification



Accessories (Additional Fee)

Displays
 Power Adapters
 RS 232 cables (scale - printer)
 Cigarette lighter receptacle power supply cables
 Barcode scanners
 RS 232, RS 485 cables
 Label Printers

Antivibration tables
 Keypad, external switches
 Stands, wall mounting kits and mounting brackets
 Additional modules
 Receipt Printer
 AP2-1 Current Loop Unit

Software (Additional Fee)


- E2R Weighing [WX-010-0099]
- Label Editor R02 [WX-010-0094]
- Scale Editor - EWAG 2.1 [WX-010-0173]

- RAD Key [WX-010-0005]
- Alibi Reader PC Software [WX-010-0114]
- RADWAG Development Studio [WX-010-0104]

Device dimensions W x D x H



C32.D2

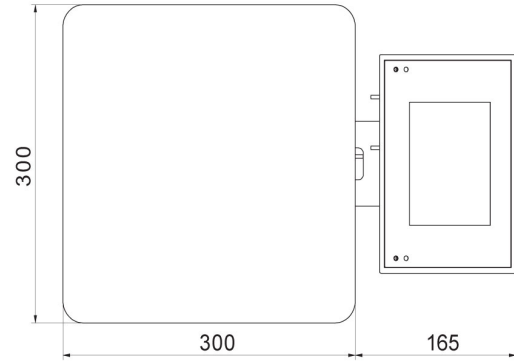

C32.F1.R



C32.F1.M



C32.F1.K