



More information on the website
mirror.radwag.com/us/info,w1,VHZ

WPY 3/F1/R Multifunctional Scale

WP-111-0065



The drawings, photos and graphics used are for illustrative purposes only.

Functions



Dosing



Labelling



Plus/Minus Control



Percent Weighing



Totalizing



Parts counting



Peak hold



Formulation



Newton unit measurement



Statistics



Checkweighing



IR sensors



Animal weighing



Differential weighing



ALIBI Memory

Datasheet

| | |
|--|-------|
| Maximum capacity [Max] | 3 kg |
| Minimum load | 20 g |
| Readability [d] | 1 g |
| Tare range | -3 kg |
| Max readability for non-verified scale | 0,2 g |
| Stabilization time | 2 s |

| | |
|--------------------------------|---|
| Adjustment | external |
| OIML Class | III |
| Physical parameters | |
| Display | 5,7" Resistive Color Touchscreen |
| Weighing pan dimensions | 300×300 mm |
| Packaging dimensions W x D x H | 570×390×170 mm |
| Net weight | 5,3 kg |
| Gross weight | 6,1 kg |
| Construction | |
| Protection class | IP 65 construction, IP 43 terminal |
| Communication interface | |
| Communication interface | 2×RS232, 2×USB-A, Ethernet, 4 IN / 4 OUT (digital), Wi-Fi |
| Power supply | |
| Power supply | 100 – 240 V AC 50/60 Hz |
| Operating temperature | |
| Operating temperature | -10 – +40 °C |

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Additional fee for verification



Accessories (Additional Fee)

Antivibration tables
 Transponder card readers
 RS 232 cables (scale - printer)
 Cigarette lighter receptacle power supply cables
 Barcode scanners
 RS 232, RS 485 cables
 Label Printers
 Displays



IN/OUT Cables
 Keypad, external switches
 Stands, wall mounting kits and mounting brackets
 Receipt Printer
 F1 Mass Standard -
 knob weights without adjustment chamber, set
 AP2-1 Current Loop Unit
 Additional Weighing platforms Module
 RS 232 – USB Converter

Software (Additional Fee)

- E2R Weighing [WX-010-0099]
- Audit Trail Reader [WX-010-0186]
- RADWAG Remote Desktop [WX-010-0107]
- RADWAG Development Studio [WX-010-0104]

- RAD Key [WX-010-0005]
- Label Editor R02 [WX-010-0094]
- Scale Editor - EWAG 2.1 [WX-010-0173]

Device dimensions W x D x H

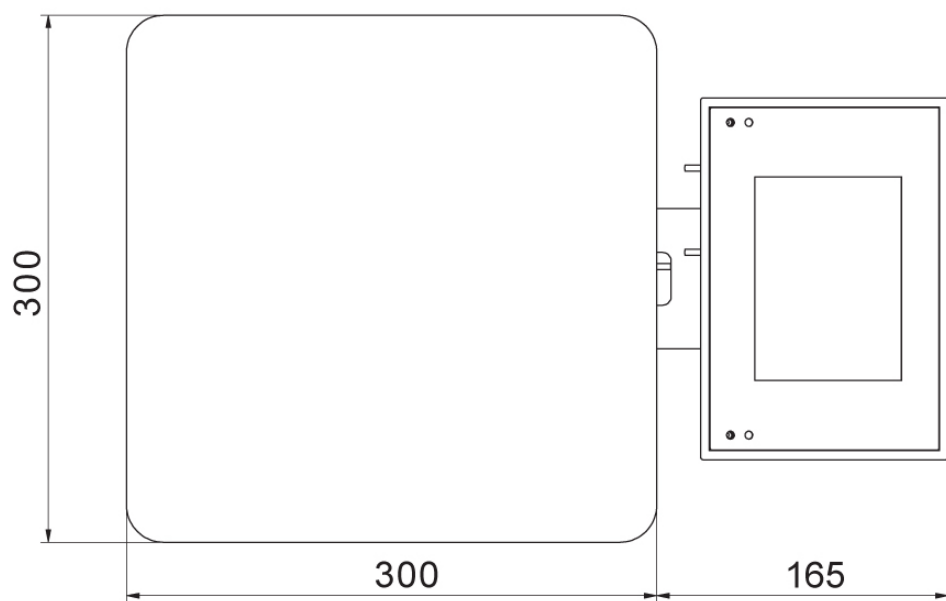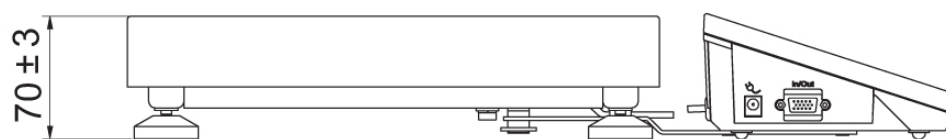

WPY F1/R
