




More information on the website  
[mirror.radwag.com/us/info,w1,B5R](http://mirror.radwag.com/us/info,w1,B5R)

# TMX15IR.60.H3.K Multifunctional Scale

WP-119-0022

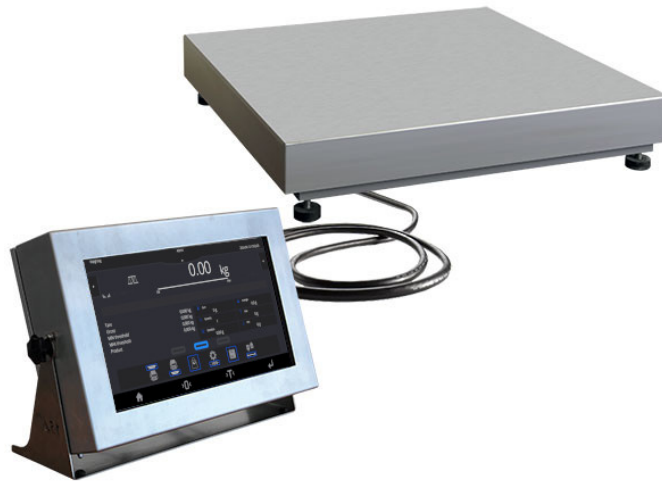

The drawings, photos and graphics used are for illustrative purposes only.

## Functions



Dosing



Labelling



Plus/Minus Control



Parts counting



Formulation



Statistics



Checkweighing

## Datasheet

Maximum capacity [Max]	60 kg
Minimum load	400 g
Readability [d]	20 g
Tare range	-60 kg
Max readability for non-verified scale	2 g
OIML Class	III
<b>Physical parameters</b>	
Display	15,6" graphic colour touchscreen
Cable length	2,5 m

Physical parameters	
Weighing pan dimensions	410×410 mm
Controlling device dimensions	560×360×240 mm
Packaging dimensions W x D x H	510×560×510 mm
Construction	
Protection class	IP 66 / 67 construction, IP 66 / 67 terminal
Communication interface	4×USB 2.0 (2×USB-A, 2×M12 4P), Ethernet - 2×10/100/1000 Mbit (2×RJ45 hermetic), Profibus DP (operation mode: slave), 2×RS232, RS485 (2×M12 8P), 4IN / 4OUT (2×ports M12 8P or 2×cables fed through the cable gland)
Optional interfaces	external buttons PRINT, TARE, START - terminal with 4IN/4OUT (M12 8P connector) is required, additional weighing platform module - max. 3 pcs, metrological parameters as in the main weighing platform
Power supply	100 – 240 V AC 50/60 Hz
Power consumption	45 W
Operating temperature	0 – +40 °C
Relative humidity	10% – 85% RH no condensation
Operating system	Microsoft Windows 11 IoT



Additional fee for verification



## Accessories (Additional Fee)

RS 232 cables (scale - printer)

Transponder card readers

RS 232 cables (scale - ZEBRA printer)

RS 232 cables (scale - Ethernet)

Displays

RS 232, RS 485 cables

Barcode scanners

Label Printers

Additional Weighing platforms Module

USB adapter

Receipt Printer

F1 Mass Standard -

knob weights without adjustment chamber, set

USB cable (scale - printer)

RS 232 – USB Converter

## Software (Additional Fee)

• RAD Key [WX-010-0005]

• Label Editor R02 [WX-010-0094]