



More information on the website
mirror.radwag.com/en/info,w1,DF9

PM01.EX-2 Intrinsically Safe Power Supply Intended for Ex Scale

WX-004-0203



The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

Physical parameters	
Cable length	10 m
Device dimensions W x D x H	216×174×64 mm
Construction	
Protection class	IP 66 / 68
ATEX Certification	II (2)G [Ex ib Gb] IIC II (2)D [Ex ib Db] IIIC
Housing	Stainless steel
Working in zones	-
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz
Power consumption max.	15 W
Environmental conditions	
Operating temperature	-20 – +40 °C
Storage temperature	-20 – +60 °C

Environmental conditions

Relative humidity

10% – 85% RH no condensation






Compatible with (Additional Fee)

HX5.EX-1.4P2 H Stainless Steel Beam Scales
HX5.EX-1 HR Stainless Steel 1-Load-Cell Platform Scales
HX5.EX-1.4P2 C Beam Scales
HX5.EX-1.4N Stainless Steel Ramp Scales
HX5.EX-1.4 C 4-Load-Cell Platform Scales
HX5.EX-1.4P H Stainless Steel Pallet Scales

HX5.EX-1.4 H/Z Stainless Steel Platform Scales, Pit Version
HX5.EX-1 C 1-Load-Cell Platform Scales
HX5.EX-1 H Waterproof Platform Scales
PUE HX5.EX Weighing Terminal
HX5.EX-1.4 H Stainless Steel 4-Load-Cell Platform Scales
HX5.EX-1.4P C Pallet Scales

Device dimensions W x D x H

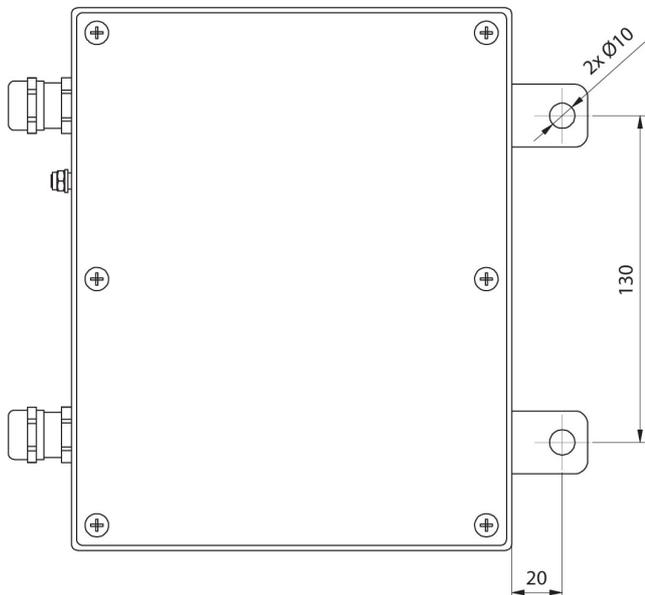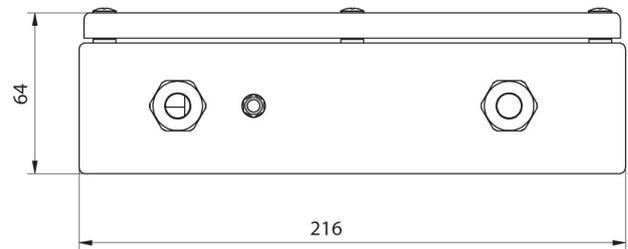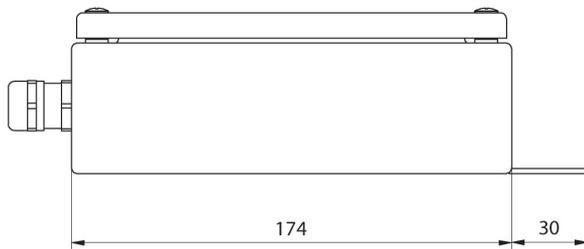

PM01.EX